

WE MAKE SUMMER

COMMERCIAL PARASOLS



BATROS

The background of the image is composed of several large, overlapping triangles in various shades of blue. A prominent dark blue triangle points downwards from the top left. Another dark blue triangle points upwards from the bottom left. These two triangles overlap in the center, creating a lighter blue diamond shape. The remaining areas are filled with other shades of blue, creating a complex, abstract geometric pattern. The word 'BATROS' is written in a bold, white, sans-serif font across the top of the image.



EXTREMELY

SOLID

**Extremely solid, especially
the small models**


Optimal use of space

All-weather protection

Easy operation

**Professional additional
equipment**



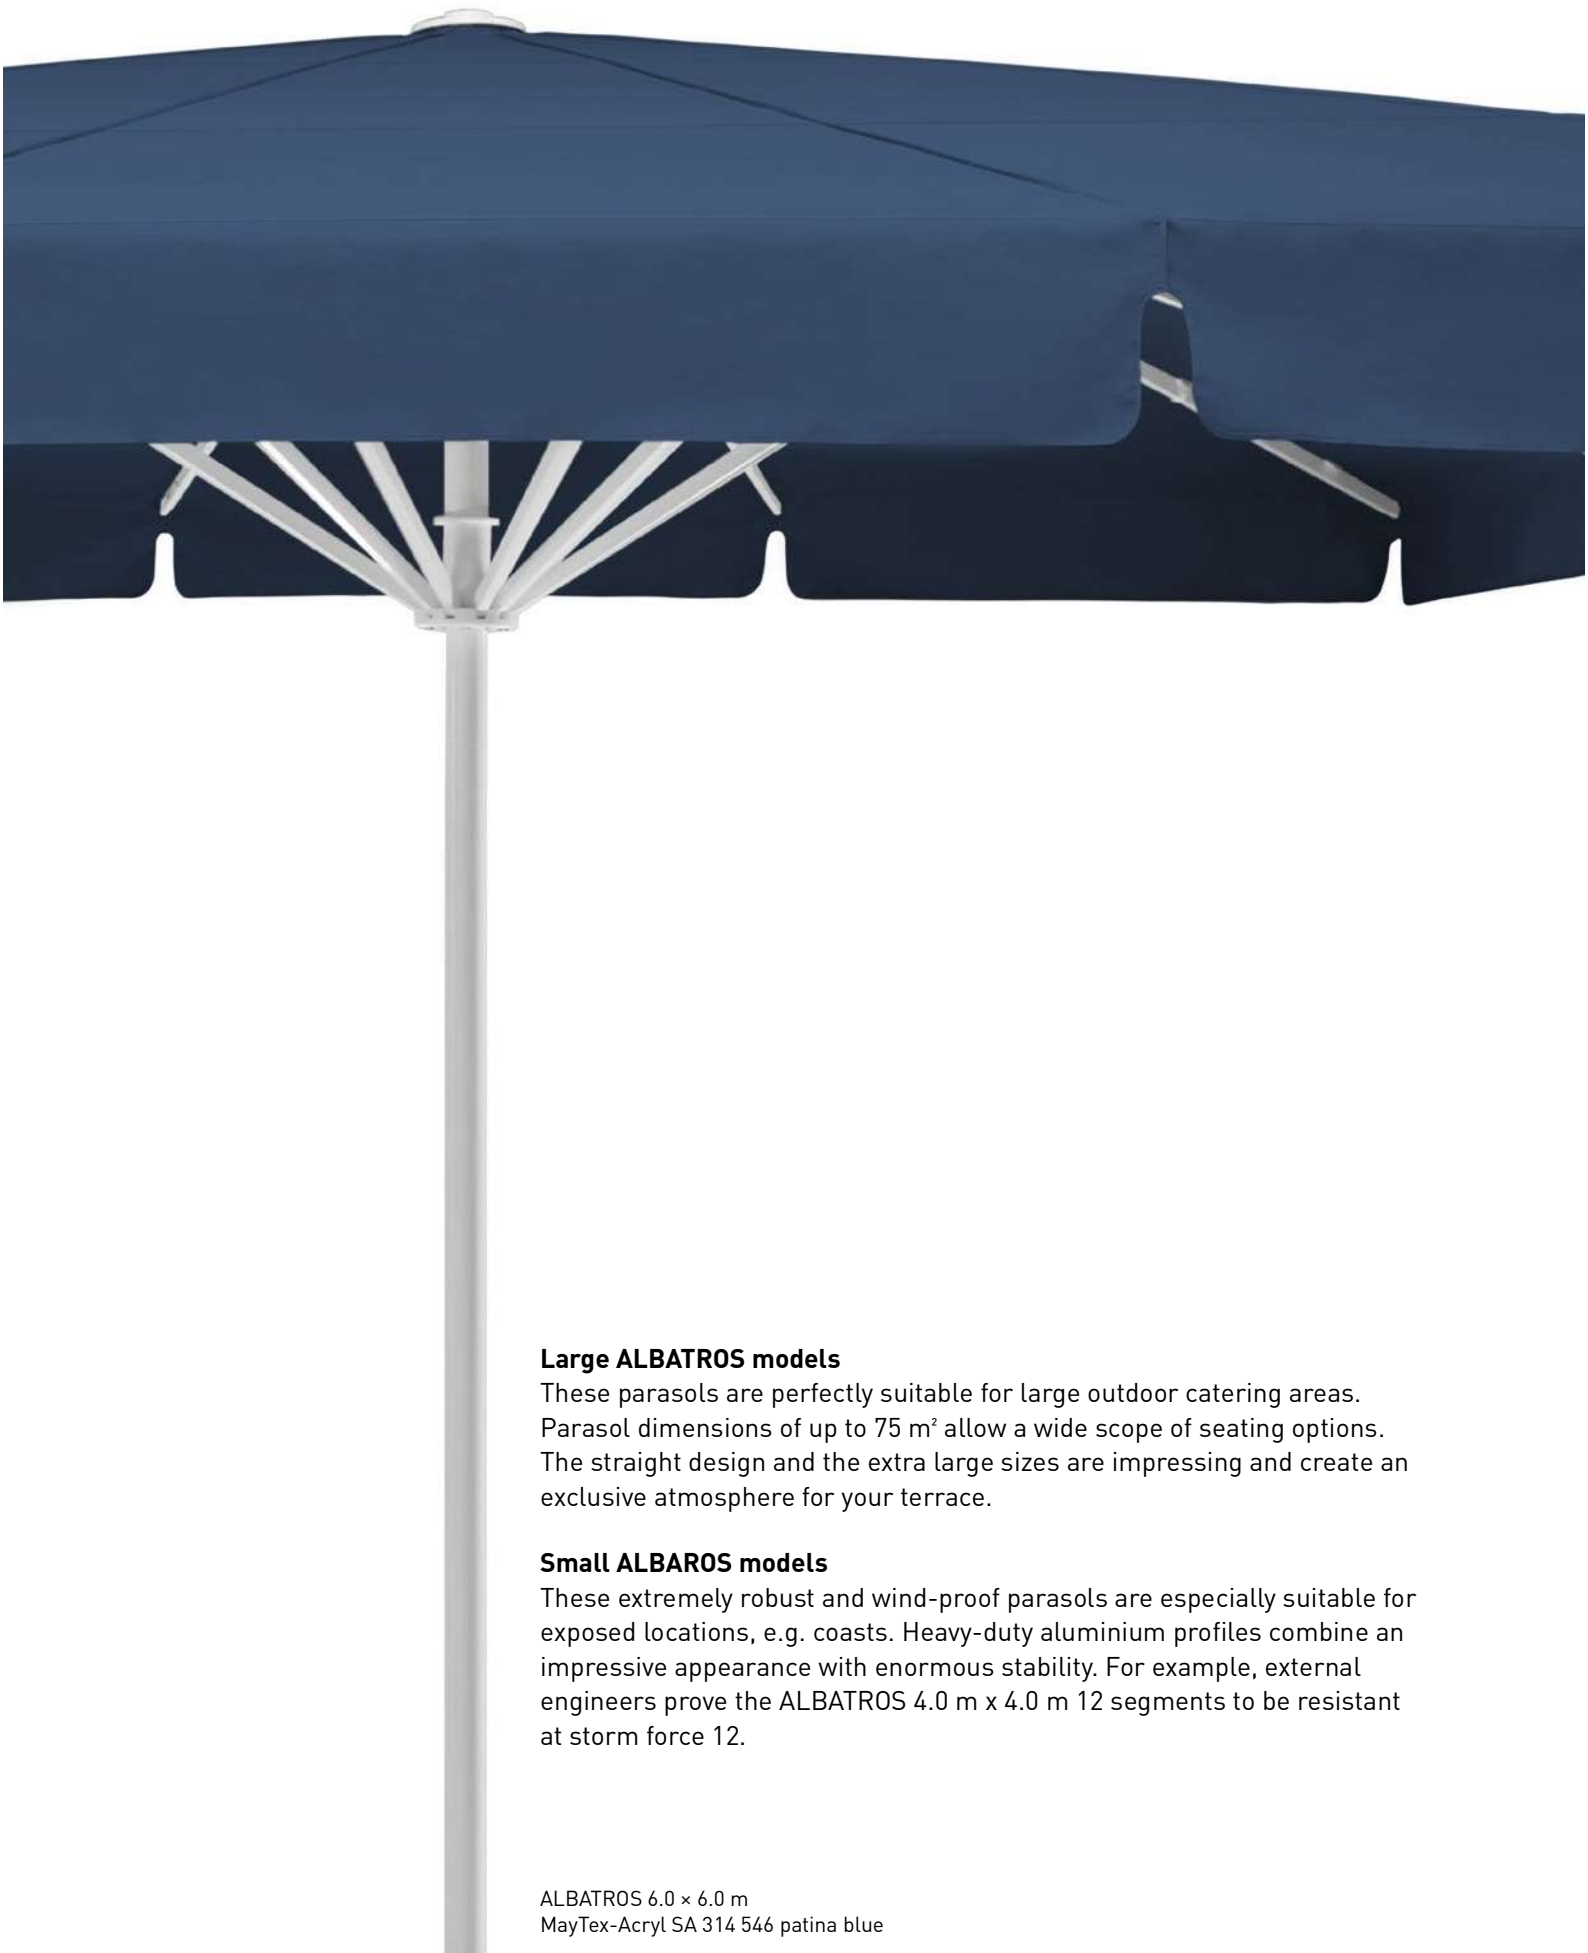

Large ALBATROS models

These parasols are perfectly suitable for large outdoor catering areas. Parasol dimensions of up to 75 m² allow a wide scope of seating options. The straight design and the extra large sizes are impressive and create an exclusive atmosphere for your terrace.

Small ALBAROS models

These extremely robust and wind-proof parasols are especially suitable for exposed locations, e.g. coasts. Heavy-duty aluminium profiles combine an impressive appearance with enormous stability. For example, external engineers prove the ALBATROS 4.0 m x 4.0 m 12 segments to be resistant at storm force 12.

ALBATROS 6.0 x 6.0 m
MayTex-Acryl SA 314 546 patina blue



You will find further reference
photos at: may.ag/A_Referenzen.pdf

ALBATROS



ALBATROS 4.0 x 5.0 m
MayTex-Acryl SA 314 325 ecru



Top plate

Elegant and graceful. Can be screwed off. Colour to match frame.


Valance options



Straight valance




Without valance

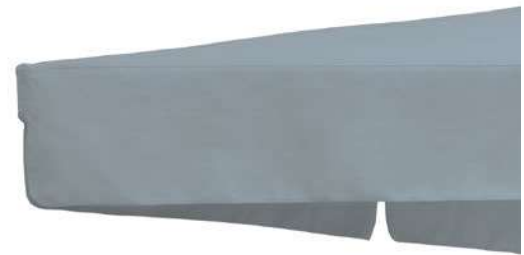

Canopy covering

Due to a special self-tensioning telescopic spring system the colour remains perfectly taut, even after years of usage. The canopy covering can easily and quickly be exchanged by means of a practical hooking system.

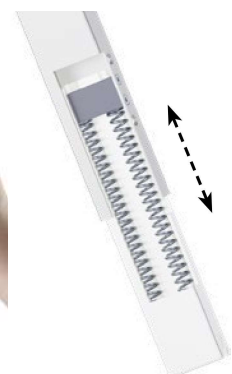

self-tensioning
telescopic spring system



Product video at: may.ag/a-en

Mounting

Pull parasol from cardboard sleeve, remove all packaging material, place parasol mast in installation base, that's all – ready for use in a jiffy!



Operating the parasol

ALBATROS, our large-area parasol, is opened and closed with a smooth-running, removable stainless steel crank (AISI 304, 1.4301) or with the help of a cordless drill (hex drill fitting). The reliable drive-system with accurate integrated bevel gears guarantees effortless handling, even after years of usage.

High-quality framework materials

Frame surface is powder-coated, highly shock and impact-proof, available in following colours:

Standard colours:

- RAL 9010 pure white

Special colours, no extra charge:

- RAL 7016 anthracite grey fine structure

Special colours available on request.



The operating instructions

Proper handling of the product ensures a long life expectancy. Benefit from our 30 years of experience:

Operating instructions: may.ag/AG_en.pdf

When not in use

The protective cover provided can easily be slipped over the parasol during bad weather periods.





Frame joints

For us perfection in workmanship is an absolute must. Therefore, all moving axes are fitted with easily removable bolts. This extravagant technology ensures maximum stability and durability as well as easy execution of repairs.

Central rod system

Discs with support struts and spokes. In order to prevent the spokes from getting twisted, the lower distribution flange is firmly welded to the support pole. The poles of our parasols are all made of high-quality alloyed, extruded aluminium profiles.

- support pole Ø 100 × 5 mm
- spoke dimensions 50 × 25 × 2 mm
- support strut dimensions 40 × 25 × 2 mm



Reinforced spokes


The elegant spokes are reinforced with an internal steel core in the areas subject to particularly high stress.

Fabrics and colours

Choose from over 70 contemporary textile designs, available in three different fabric types:

- MayTex-Poly, 230 g/m², water column > 1.000 mm
- MayTex-Acryl, 300 g/m², water column 370 mm
- MayTex-PVC, 480 g/m², water column > 1.000 mm
- Other fabrics and colours available at any time on request
- Textiles with fire certification (A or B1) on request

See page 220 for further information.





ALBATROS Ø 4.5 m, 12 Segments
MayTex-Acryl SA 314 010 white
without valance



straight valance

74 cm

180 cm



214 cm



ALBATROS Ø 8.0 m, 12 Segments
MayTex-Acryl SA 314 003 yellow
without valance



straight valance




ALBATROS round			Ø 4.0 m	Ø 4.0 m	Ø 4.5 m	Ø 4.5 m	
Segments			8	12	8	12	
Area m²			11.3	12	14.3	15.2	
A	Height closed incl. top plate	cm	461	461	477	477	
B	Height opened incl. top plate	cm	311	311	319	319	
C	Headroom with valance	cm	214	214	214	214	
D	Headroom without valance	cm	242	242	242	242	
from spoke edge							
F	Ground clearance from spoke edge	cm	252	252	246	246	
H	Height lower disc flange	cm	242	242	242	242	
Extended steel reinforcement			integrated	integrated	integrated	integrated	
Weight without packaging			kg	63	85	70	97
MayTex-Acryl without valance							
Support pole diameter			mm	outer-Ø 100, pole thickness 5			
Packaging			length 480 cm	length 480 cm	length 500 cm	length 500 cm	
cardboard sleeve Ø 45 cm			weight 34 kg	weight 34 kg	weight 36 kg	weight 36 kg	
Installation base			cm	60/60/60	60/60/60	65/65/60	65/65/60
length/width/min. depth							
Minimum-ballast			6 × = approx.	6 × = approx.	7 × = approx.	7 × = approx.	
Number of layers of concrete slabs XZ49 required			672 kg	672 kg	784 kg	784 kg	

¹⁾ When concrete slabs are used as ballast, the parasol cannot be fully closed because of the length of the spokes. In this case the length of the mast can be extended by 20 cm at an extra charge (see pricelist Accessories and Bases). Note that the height dimensions then have to be increased by 20 cm.

The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube AZ120. The increase in height for parasols with other installation bases can be seen in the list below:

Full frame pedestal:	AZ111	+	1.5 cm
Full frame pedestal:	AZ112	+	2 / 6 cm
Full frame pedestal:	AZ116	+	10 / 14 cm
Anchor plate:	AZ024	+	1.5 cm
Base plate:	AZ246	+	3 cm
Base plate:	AZ247	+	4.5 cm
Base plate:	AZ248	+	6 cm
Base plate:	AZ249	+	7.5 cm
Concrete parasol base:	AZ361 / AZ371	+	48.5 / 52.5 cm







3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.

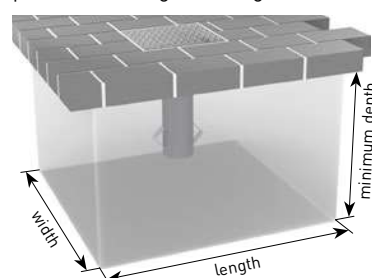


Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.


ALBATROS

SIZES AND DATA



	Ø 5.0 m	Ø 5.0 m	Ø 5.5 m	Ø 5.5 m	Ø 6.0 m	Ø 6.0 m
	8	12	8	12	8	12
	17.7	18.8	21.4	22.7	25.4	27
A	490	490	457	457	529	529
B	326	326	334	334	342	342
C	214	214	214	214	214	214
D	242	242	242	242	242	242
F	229	229	171	171	216	216
H	242	242	242	242	242	242
	integrated	integrated	integrated	integrated	integrated	integrated
	90	104	88	114	97	126
outer-Ø 100, pole thickness 5						
	length 510 cm weight 36 kg	length 510 cm weight 36 kg	length 480 cm weight 34 kg	length 480 cm weight 34 kg	length 560 cm weight 41 kg	length 560 cm weight 41 kg
	70/70/60	70/70/60	70/70/60	70/70/60	75/75/60	75/75/60
	8 x = approx. 896 kg	8 x = approx. 896 kg	8 x = approx. 896 kg	8 x = approx. 896 kg	9 x = approx. 1,008 kg	9 x = approx. 1,008 kg

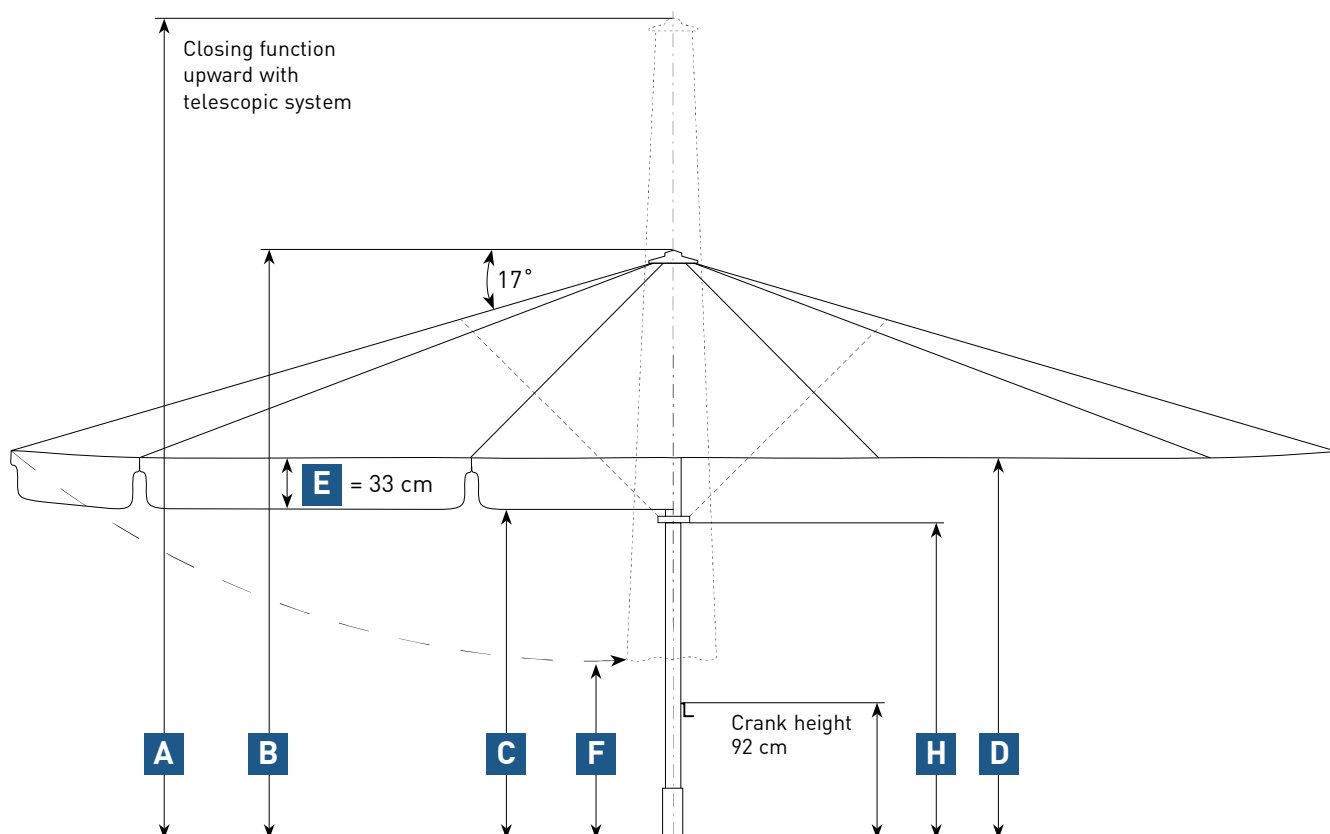

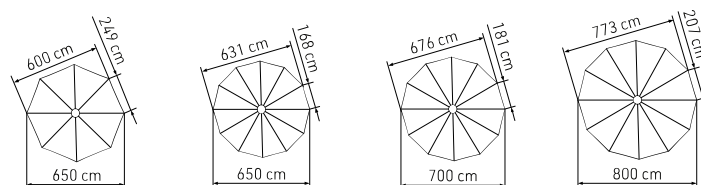


ALBATROS round			Ø 6.5 m	Ø 6.5 m	Ø 7.0 m	Ø 8.0 m
Segments			8	12	12	12
Area m²			29.8	31.7	36.8	48
A	Height closed incl. top plate	cm	500	500	520	535
B	Height opened incl. top plate	cm	350	350	345	360
C	Headroom with valance	cm	214	214	217	217
D	Headroom without valance	cm	242	242	245	245
from spoke edge						
F	Ground clearance from spoke edge	cm	161	161	155	120
H	Height lower disc flange	cm	242	242	190	205
Extended steel reinforcement			integrated	optional	optional	optional
Weight without packaging			kg	116	128	128
MayTex-Acryl without valance						133
Support pole diameter			mm	outer-Ø 100, pole thickness 5		
Packaging			length 530 cm	length 530 cm	length 560 cm	length 560 cm
cardboard sleeve Ø 45 cm			weight 39 kg	weight 39 kg	weight 41 kg	weight 41 kg
Installation base			cm	80/80/60	80/80/60	85/85/60
length/width/min. depth						90/90/60
Minimum-ballast			10 x = approx.	10 x = approx.	11 x = approx.	11 x = approx.
Number of layers of concrete slabs XZ49 required			1,120 kg	1,120 kg	1,232 kg	1,232 kg

¹⁾ When concrete slabs are used as ballast, the parasol cannot be fully closed because of the length of the spokes. In this case the length of the mast can be extended by 20 cm at an extra charge (see pricelist Accessories and Bases). Note that the height dimensions then have to be increased by 20 cm.

The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube AZ120. The increase in height for parasols with other installation bases can be seen in the list below:

Full frame pedestal:	AZ111	+	1.5 cm
Full frame pedestal:	AZ112	+	2 / 6 cm
Full frame pedestal:	AZ116	+	10 / 14 cm
Anchor plate:	AZ024	+	1.5 cm
Base plate:	AZ246	+	3 cm
Base plate:	AZ247	+	4.5 cm
Base plate:	AZ248	+	6 cm
Base plate:	AZ249	+	7.5 cm
Concrete parasol base:	AZ361 / AZ371	+	48.5 / 52.5 cm


3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.

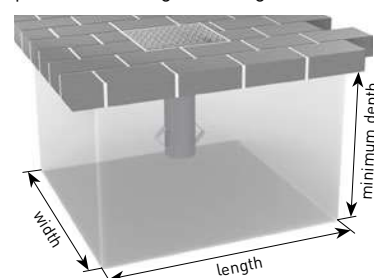


Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.

ALBATROS

SIZES AND DATA

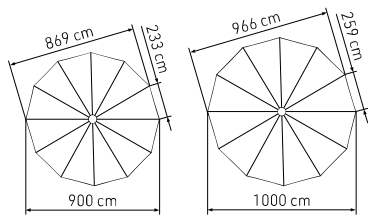

	Ø 9.0 m	Ø 10.0 m ¹⁾
	12	12
	60.8	75
A	550	565
B	375	390
C	217	212
D	242	240
F	85	50
H	220	235
	optional	optional
	147	160
	outer-Ø 100, pole thickness 5	
	length 560 cm weight 41 kg	length 560 cm weight 41 kg
	95/95/60	100 / 100 / 60
	12 × = approx. 1,344 kg	14 × = approx. 1,568 kg

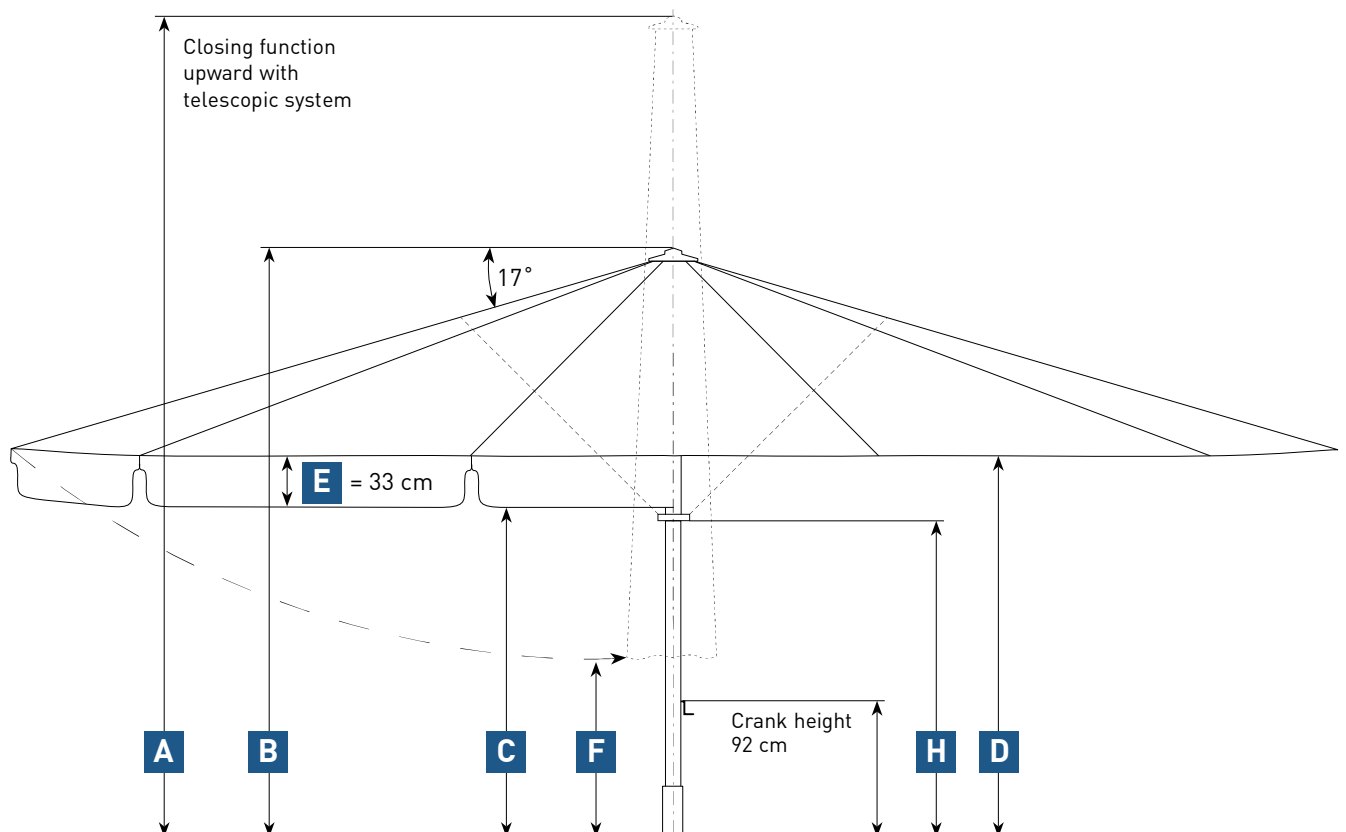



ALBATROS 3.5 × 3.5 m, 8 Segments
MayTex-Acryl SA 314 396 green/apple green, structured
without valance



straight valance



continuous valance







ALBATROS 5.0 x 5.0 m, 12 Segments
MayTex-Acryl SA 314 030 light grey
without valance



straight valance



continuous valance




ALBATROS square			3.0 × 3.0 m	3.5 × 3.5 m	3.5 × 3.5 m	4.0 × 4.0 m	
	Segments		8	8	12	8	
	Area	m²	9	12.3	12.3	16	
A	Height closed incl. top plate	cm	433	448	450	461	
B	Height opened incl. top plate	cm	296	304	308	311	
C	Headroom with valance	cm	214	214	214	214	
D	Headroom without valance from spoke edge	cm	242	242	242	242	
F	Ground clearance from spoke edge	cm	211	187	195	166	
H	Height lower disc flange	cm	242	242	242	242	
Extended steel reinforcement			integrated	integrated	integrated	integrated	
Weight without packaging MayTex-Acryl without valance			kg	57	64	89	73
Support pole diameter			mm	outer-Ø 100, pole thickness 5			
Packaging cardboard sleeve Ø 45 cm			length 470 cm weight 33 kg	length 470 cm weight 33 kg	length 470 cm weight 33 kg	length 480 cm weight 34 kg	
Installation base length/width/min. depth			cm	60/60/60	60/60/60	60/60/60	65/65/60
Minimum-ballast Number of layers of concrete slabs XZ49 required			6 × = approx. 672 kg	6 × = approx. 672 kg	6 × = approx. 672 kg	6 × = approx. 672 kg	

¹⁾ When concrete slabs are used as ballast, the parasol cannot be fully closed because of the length of the spokes. In this case the length of the mast can be extended by 20 cm at an extra charge (see pricelist Accessories and Bases). Note that the height dimensions then have to be increased by 20 cm.

The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube AZ120. The increase in height for parasols with other installation bases can be seen in the list below:

Full frame pedestal:	AZ111	+	1.5 cm
Full frame pedestal:	AZ112	+	2 / 6 cm
Full frame pedestal:	AZ116	+	10 / 14 cm
Anchor plate:	AZ024	+	1.5 cm
Base plate:	AZ246	+	3 cm
Base plate:	AZ247	+	4.5 cm
Base plate:	AZ248	+	6 cm
Base plate:	AZ249	+	7.5 cm
Concrete parasol base:	AZ361 / AZ371	+	48.5 / 52.5 cm


3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.

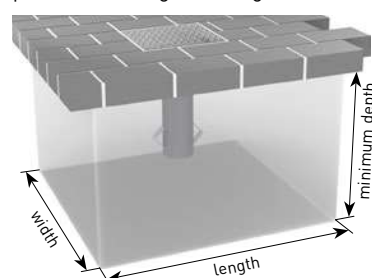


Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.

ALBATROS

SIZES AND DATA



	4.0 × 4.0 m	4.5 × 4.5 m	4.5 × 4.5 m	5.0 × 5.0 m	5.0 × 5.0 m
	12	8	12	8	12
	16	20.3	20.3	25	25
A	458	480	480	492	492
B	311	319	319	327	327
C	214	214	214	214	214
D	242	242	242	242	242
F	169	147	155	125	131
H	242	242	242	242	242
	integrated	integrated	integrated	integrated	integrated
	93	82	97	93	108
outer-Ø 100, pole thickness 5					
	length 480 cm weight 34 kg	length 500 cm weight 36 kg	length 500 cm weight 36 kg	length 510 cm weight 36 kg	length 510 cm weight 36 kg
	70/70/60	75/75/60	80/80/60	80/80/60	85/85/60
	8 × = approx. 896 kg	9 × = approx. 1,008 kg	10 × = approx. 1,120 kg	10 × = approx. 1,120 kg	11 × = approx. 1,232 kg

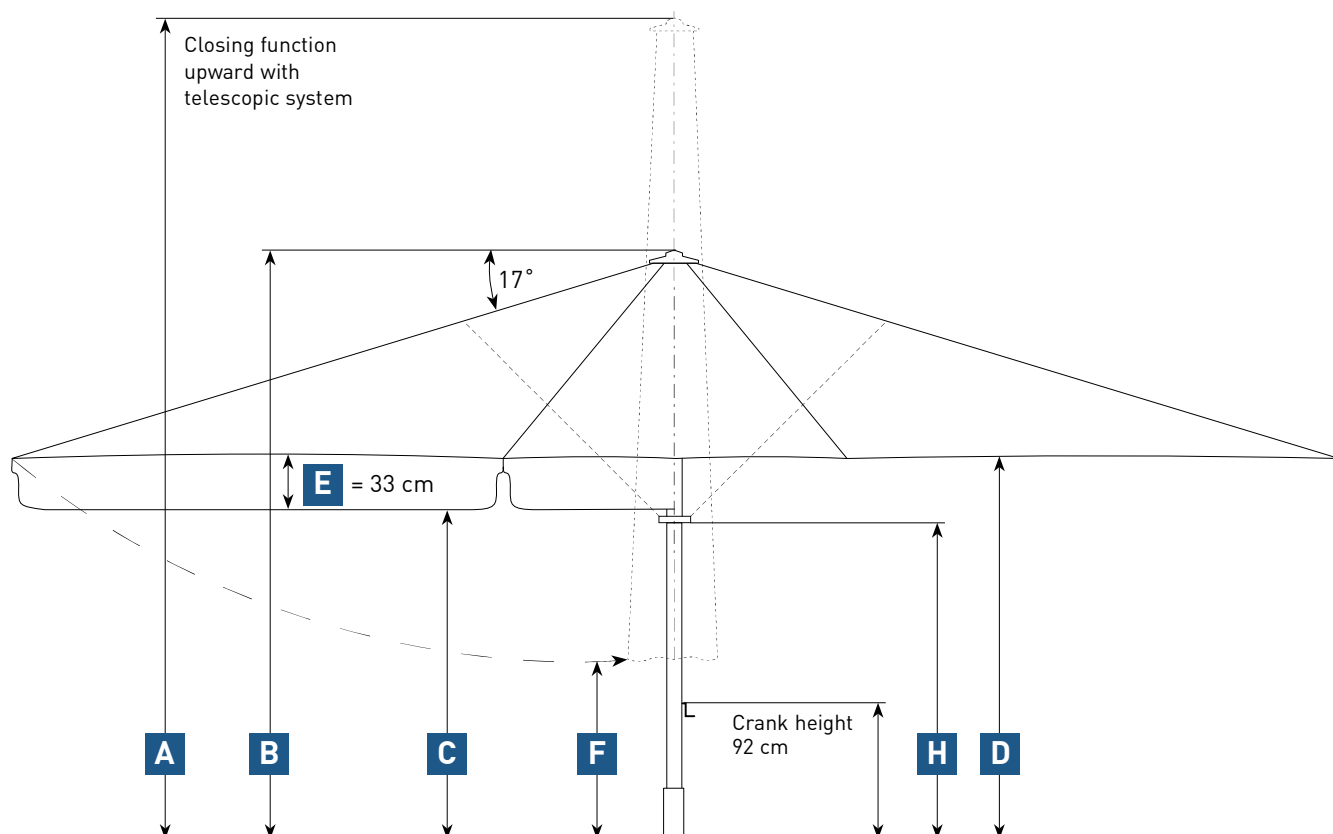



ALBATROS 5.5 x 5.5 m, 8 Segments
MayTex-Acryl SA 314 325 ecru
without valance



straight valance



continuous valance




ALBATROS 6.0 x 6.0 m, 12 Segments
MayTex-Acryl DA 7244 lime green
without valance



straight valance



continuous valance

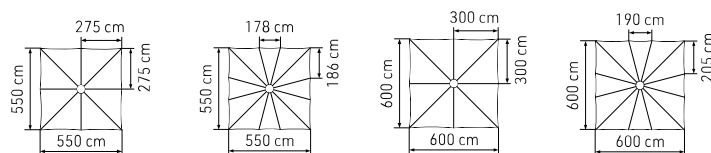


ALBATROS square			5.5 × 5.5 m	5.5 × 5.5 m	6.0 × 6.0 m	6.0 × 6.0 m	
Segments			8	12	8	12	
Area m²			30.3	30.3	36	36	
A	Height closed incl. top plate	cm	456	507	514	535	
B	Height opened incl. top plate	cm	334	334	342	345	
C	Headroom with valance	cm	214	214	214	217	
D	Headroom without valance from spoke edge	cm	242	242	242	245	
F	Ground clearance from spoke edge	cm	51	102	75	95	
H	Height lower disc flange	cm	242	242	242	200	
Extended steel reinforcement			integrated	integrated	integrated	optional	
Weight without packaging MayTex-Acryl without valance			kg	97	116	105	113
Support pole diameter			mm	outer-Ø 100, pole thickness 5			
Packaging cardboard sleeve Ø 45 cm			length 500 cm weight 36 kg	length 530 cm weight 39 kg	length 530 cm weight 39 kg	length 560 cm weight 41 kg	
Installation base length/width/min. depth			cm	80/80/60	85/85/60	80/80/60	85/85/60
Minimum-ballast Number of layers of concrete slabs XZ49 required			10 × = approx. 1,120 kg	11 × = approx. 1,232 kg	10 × = approx. 1,120 kg	10 × = approx. 1,120 kg	

¹⁾ When concrete slabs are used as ballast, the parasol cannot be fully closed because of the length of the spokes. In this case the length of the mast can be extended by 20 cm at an extra charge (see pricelist Accessories and Bases). Note that the height dimensions then have to be increased by 20 cm.

The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube AZ120. The increase in height for parasols with other installation bases can be seen in the list below:

Full frame pedestal:	AZ111	+	1.5 cm
Full frame pedestal:	AZ112	+	2 / 6 cm
Full frame pedestal:	AZ116	+	10 / 14 cm
Anchor plate:	AZ024	+	1.5 cm
Base plate:	AZ246	+	3 cm
Base plate:	AZ247	+	4.5 cm
Base plate:	AZ248	+	6 cm
Base plate:	AZ249	+	7.5 cm
Concrete parasol base:	AZ361 / AZ371	+	48.5 / 52.5 cm


3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.

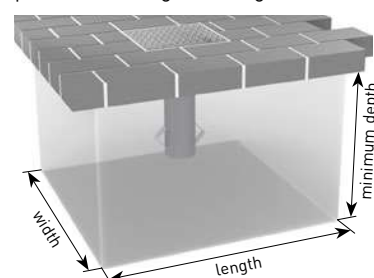


Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.

ALBATROS

SIZES AND DATA

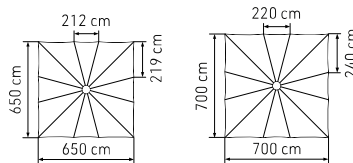


ALBATROS square			6.5 × 6.5 m	7.0 × 7.0 m ¹⁾
	Segments		12	12
	Area	m ²	42.3	49
A	Height closed incl. top plate	cm	534	545
B	Height opened incl. top plate	cm	349	375
C	Headroom with valance	cm	214	217
D	Headroom without valance from spoke edge	cm	242	245
F	Ground clearance from spoke edge	cm	57	25
H	Height lower disc flange	cm	242	235
	Extended steel reinforcement		optional	optional
	Weight without packaging MayTex-Acryl without valance	kg	130	160
	Support pole diameter	mm	outer-Ø 100, pole thickness 5	
	Packaging cardboard sleeve Ø 45 cm		length 560 cm weight 41 kg	length 560 cm weight 41 kg
	Installation base length/width/min. depth		90/90/60	90/90/60
	Minimum-ballast Number of layers of concrete slabs XZ49 required		11 × = approx. 1,232 kg	11 × = approx. 1,232 kg

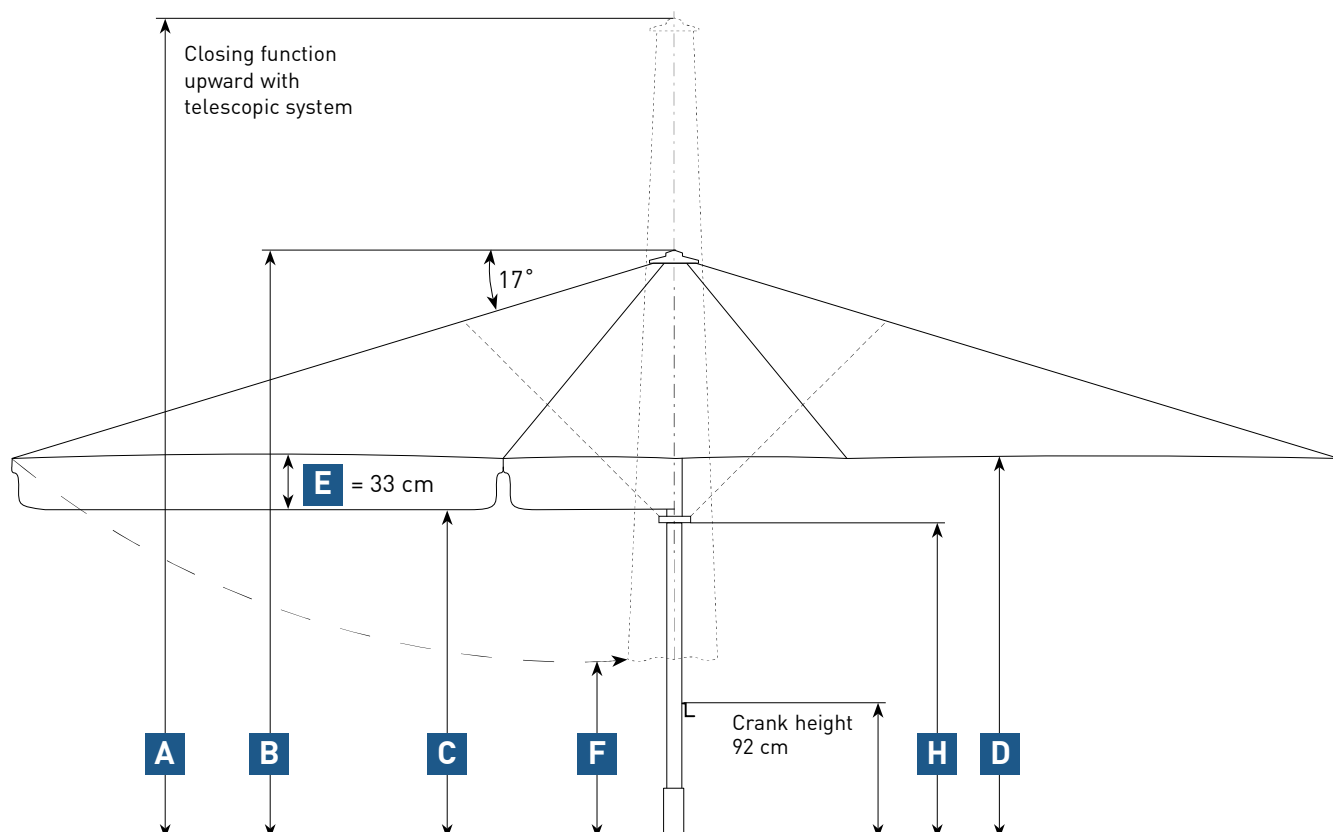



ALBATROS 4.0 × 6.0 m
MayTex-Acryl DA 8203 basalt grey
without valance

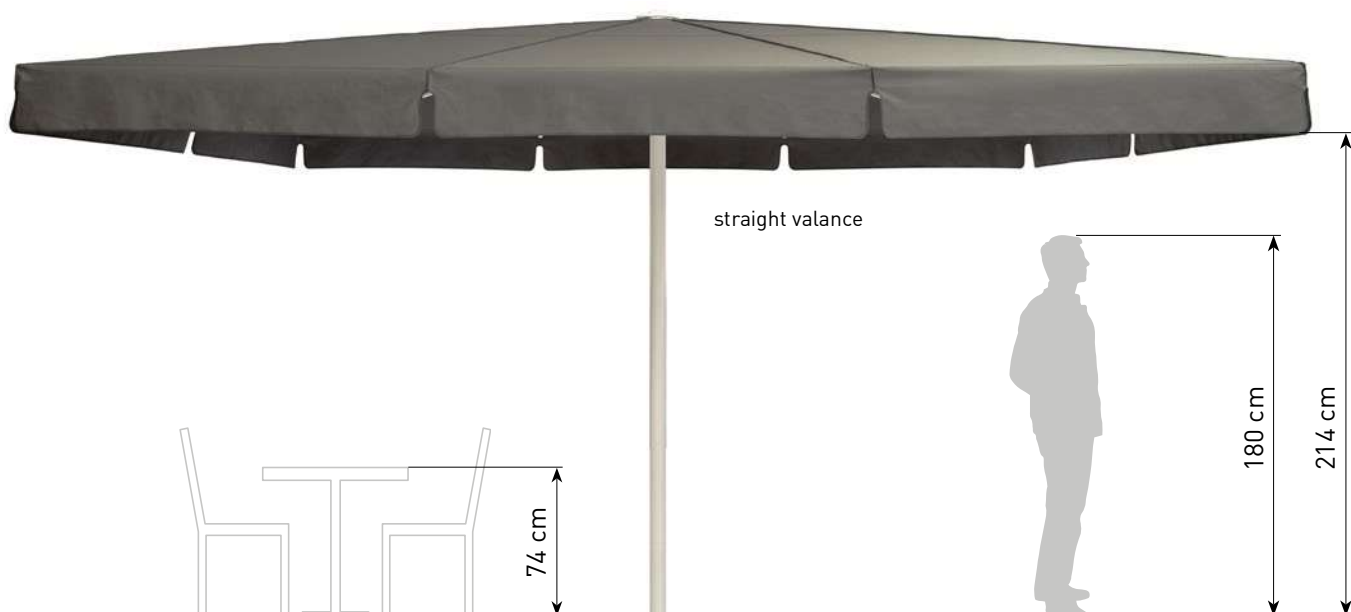


ALBATROS



ALBATROS 7.0 × 8.0 m
MayTex-Acryl SA 314 362 dark green
without valance



straight valance




ALBATROS rectangular			3.0 × 4.0 m	3.0 × 6.0 m	3.5 × 5.0 m	3.5 × 5.5 m	3.5 × 7.0 m	
Segments			10	10	10	10	10	
Area m²			12	18	17.5	19,3	24.5	
A	Height closed incl. top plate	cm	437	483	447	446	490	
B	Height opened incl. top plate	cm	296	305	304	304	312	
C	Headroom with valance	cm	214	214	214	214	214	
D	Headroom without valance from spoke edge	cm	242	242	242	242	242	
F	Ground clearance from spoke edge	cm	182	132	138	110	83	
H	Height lower disc flange	cm	242	198	242	242	205	
Extended steel reinforcement			integrated	integrated	integrated	integrated	integrated	
Weight without packaging MayTex-Acryl without valance			kg	82	99	88	89	104
Support pole diameter			mm	outer-Ø 100, pole thickness 5				
Packaging cardboard sleeve Ø 45 cm			length 460 cm weight 32 kg	length 500 cm weight 36 kg	length 480 cm weight 34 kg	length 480 cm weight 34 kg	length 500 cm weight 36 kg	
Installation base length/width/min. depth			cm	60/60/60	75/75/60	75/75/60	75/75/60	85/85/60
Minimum-ballast Number of layers of concrete slabs XZ49 required			6 × = approx. 672 kg	9 × = approx. 1,008 kg	9 × = approx. 1,008 kg	9 × = approx. 1,008 kg	11 × = approx. 1,232 kg	

¹⁾ When concrete slabs are used as ballast, the parasol cannot be fully closed because of the length of the spokes. In this case the length of the mast can be extended by 20 cm at an extra charge (see pricelist Accessories and Bases). Note that the height dimensions then have to be increased by 20 cm.

The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube AZ120. The increase in height for parasols with other installation bases can be seen in the list below:

Full frame pedestal:	AZ111	+	1.5 cm
Full frame pedestal:	AZ112	+	2 / 6 cm
Full frame pedestal:	AZ116	+	10 / 14 cm
Anchor plate:	AZ024	+	1.5 cm
Base plate:	AZ246	+	3 cm
Base plate:	AZ247	+	4.5 cm
Base plate:	AZ248	+	6 cm
Base plate:	AZ249	+	7.5 cm
Concrete parasol base:	AZ361 / AZ371	+	48.5 / 52.5 cm


3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.

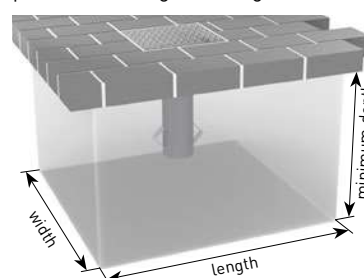


Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.


ALBATROS

SIZES AND DATA

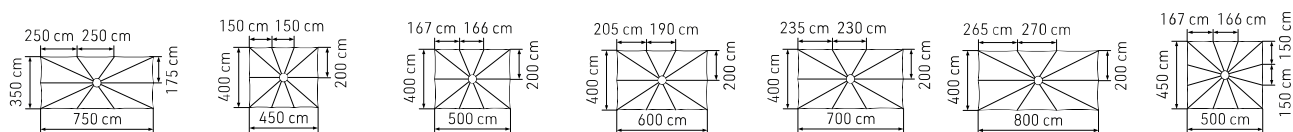

	3.5 × 7.5 m ¹⁾	4.0 × 4.5 m	4.0 × 5.0 m	4.0 × 6.0 m	4.0 × 7.0 m ¹⁾	4.0 × 8.0 m	4.5 × 5.0 m
	10	10	10	10	10	10	12
	26.3	18	20	24	28	32	22.5
A	453	463	463	463	463	523	478
B	303	311	311	312	311	334	319
C	214	214	214	214	214	214	214
D	242	242	242	242	242	242	242
F	38	151	137	106	57	68	136
H	242	242	242	242	242	193	242
	integrated	integrated	integrated	integrated	integrated	optional	integrated
	106	88	100	114	103	129	96
outer-Ø 100, pole thickness 5							
	length 480 cm weight 34 kg	length 500 cm weight 36 kg	length 480 cm weight 34 kg	length 480 cm weight 34 kg	length 480 cm weight 34 kg	length 560 cm weight 41 kg	length 500 cm weight 36 kg
	80/80/60	65/65/60	65/65/60	80/80/60	80/80/60	80/80/60	80/80/60
	10 × = approx. 1,120 kg	6 × = approx. 672 kg	6 × = approx. 672 kg	10 × = approx. 1,120 kg	10 × = approx. 1,120 kg	10 × = approx. 1,120 kg	10 × = approx. 1,120 kg

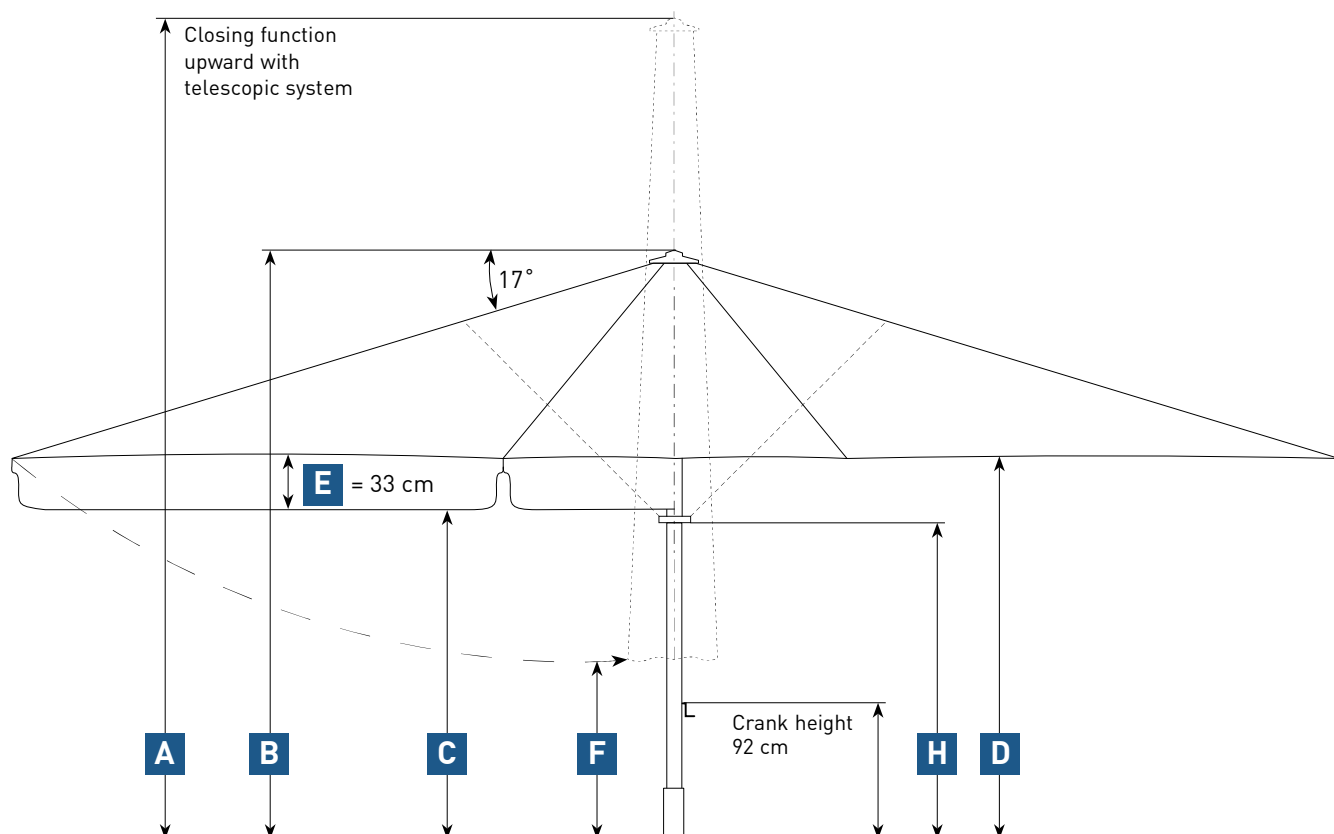




ALBATROS rectangular			4.5 × 5.5 m	4.5 × 6.0 m	4.5 × 7.5 m	5.0 × 5.85 m
Segments			12	12	10	12
Area			m ² 24.8	27	33,8	29
A	Height closed incl. top plate	cm	478	477	477	525
B	Height opened incl. top plate	cm	319	319	319	329
C	Headroom with valance	cm	214	214	214	212
D	Headroom without valance from spoke edge	cm	242	242	242	240
F	Ground clearance from spoke edge	cm	117	91	37	130
H	Height lower disc flange	cm	242	242	242	190
Extended steel reinforcement			integrated	integrated	optional	optional
Weight without packaging MayTex-Acryl without valance			kg 120	121	118	106
Support pole diameter			mm	outer-Ø 100, pole thickness 5		
Packaging cardboard sleeve Ø 45 cm			length 500 cm weight 36 kg	length 510 cm weight 36 kg	length 500 cm weight 36 kg	length 560 cm weight 41 kg
Installation base length/width/min. depth			cm 85/85/60	85/85/60	80/80/60	80/80/60
Minimum-ballast Number of layers of concrete slabs XZ49 required			11 × = approx. 1,232 kg	11 × = approx. 1,232 kg	10 × = approx. 1,120 kg	10 × = approx. 1,120 kg

¹⁾ When concrete slabs are used as ballast, the parasol cannot be fully closed because of the length of the spokes. In this case the length of the mast can be extended by 20 cm at an extra charge (see pricelist Accessories and Bases). Note that the height dimensions then have to be increased by 20 cm.


The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube AZ120. The increase in height for parasols with other installation bases can be seen in the list below:

Full frame pedestal:	AZ111	+	1.5 cm
Full frame pedestal:	AZ112	+	2 / 6 cm
Full frame pedestal:	AZ116	+	10 / 14 cm
Anchor plate:	AZ024	+	1.5 cm
Base plate:	AZ246	+	3 cm
Base plate:	AZ247	+	4.5 cm
Base plate:	AZ248	+	6 cm
Base plate:	AZ249	+	7.5 cm
Concrete parasol base:	AZ361 / AZ371	+	48.5 / 52.5 cm


3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.

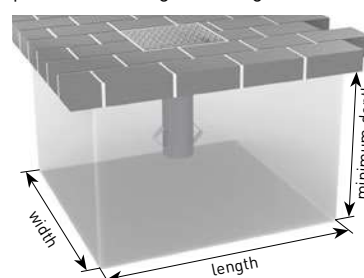

Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.

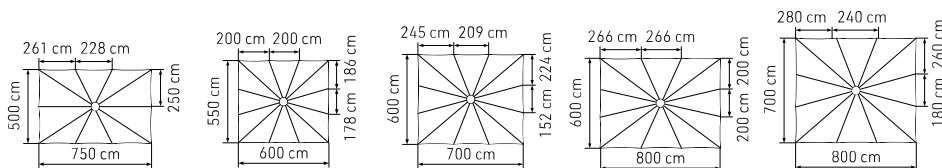

	5.0 × 7.5 m	5.5 × 6.0 m	6.0 × 7.0 m	6.0 × 8.0 m ¹⁾	7.0 × 8.0 m ¹⁾
	10	12	12	12	12
	37.5	33	42	48	56
A	535	507	555	527	570
B	329	334	359	342	375
C	212	214	214	214	217
D	240	242	242	242	245
F	72	93	72	14	20
H	200	242	207	242	235
	optional	optional	optional	optional	optional
	129	124	121	161	160
outer-Ø 100, pole thickness 5					
	length 560 cm weight 41 kg	length 530 cm weight 39 kg	length 560 cm weight 41 kg	length 560 cm weight 41 kg	length 560 cm weight 41 kg
	75/75/60	80/80/60	80/80/60	80/80/60	105/105/60
	9 × = approx. 1,008 kg	10 × = approx. 1,120 kg	10 × = approx. 1,120 kg	10 × = approx. 1,120 kg	16 × = approx. 1,792 kg

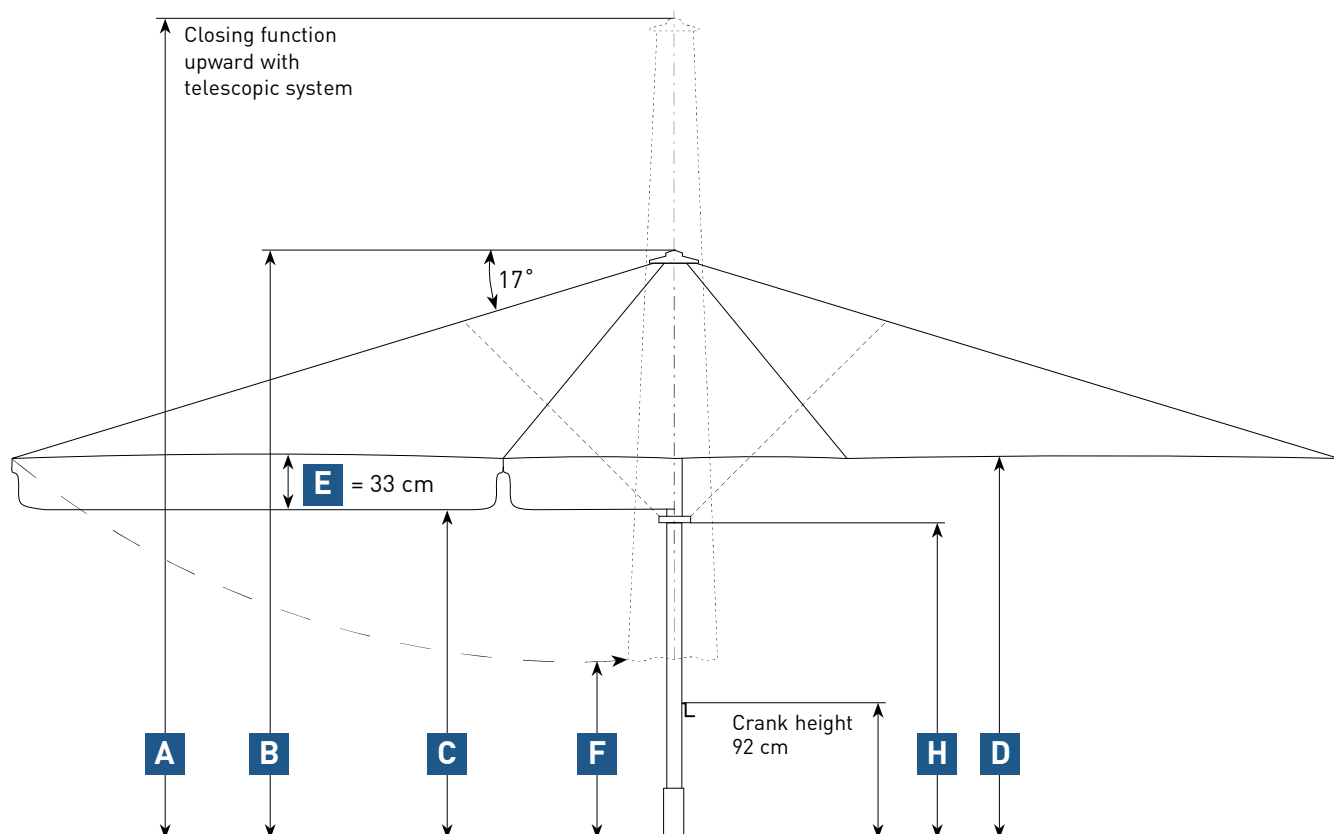



ALBATROS 5.0 × 5.0 m
MAY-Tex Acryl DA 8779 olive brown
Special colour of frame RAL 9005



stainless steel V4A

Seawater-resistant stainless steel connections

To allow the use of the ALBATROS directly at the coast nearby salty sea water, materials must be used that will not rust for many years. With this package all turned and standard parts are supplied in stainless steel V4A (1.4401, AISI 316). Optimal protection for minimal oxidation of the aluminium frame.

art. no. **350139**



Hexagonal fitting

for speedy opening and closing of parasol with battery-powered drill.

art. no. **200112**

ALBATROS

ACCESSORIES



ALBATROS 5.0 × 5.85 m
MayTex-Acryl SA 314 325 ecru

6.0 × 8.0 m

4.0 × 8.0 m

Protective cover, version zipper

with zipper and rope, without telescopic pole, art. no. 356041; made of tarp material, colour grey. May also be used for parasols with heaters, if they are demounted (winter storage). Please specify parasol size or serial number.

art. no. **AA122**



Protective cover, version zipper for parasols with integrated heaters

with zipper and rope, without telescopic pole, art. no. 356041; made of tarp material, colour grey. For daily protection of your parasols with mounted heaters. Please specify parasol size or serial number.

art. no. **AA124**



Telescopic pole

maximum length 4.5 m, without ring. For retrofit of all protective covers with zipper. No ladder required for pulling on the protective cover. One piece per terrace needed.

art. no. **356041**





ALBATROS 5.0 × 5.0 m, MayTex-Acryl SA 314 030 light grey
with rain gutter XA141, MayTex-Poly M9653 grey



Rain gutter

in MayTex-Poly and MayTex-PVC, with aluminium rods for stabilization.
Can only be used with valance.

art. no. **XA141**



Glass-fibre reinforced plastic holder for side sheet and rain gutter

1 piece per spoke required.

with 1 eyelet screw

with 2 eyelet screws

art. no. **AA141 01**

art. no. **AA141 02**



Holder for suspended rain gutter

made from aluminium and stainless steel,
1 piece per spoke required.

with 1 eyelet screw and
1 stainless steel angle, left

art. no. **AA150**

with 1 eyelet screw and
1 stainless steel angle, right

art. no. **AA151**

with 2 eyelet screw and
2 stainless steel angles

art. no. **AA152**



Length extension of centre pole

State required additional length in cm (max. 70 cm).

Shortening of centre pole

Length on request, dependent on parasol size.

Frame paint finish

Please state colour of powder-coating in RAL.


Canopy covering MayTex-PVC

approx. 480 g/m² ± 5%.

Side sheets

Textile in MayTex-Poly, see page 218 onwards.



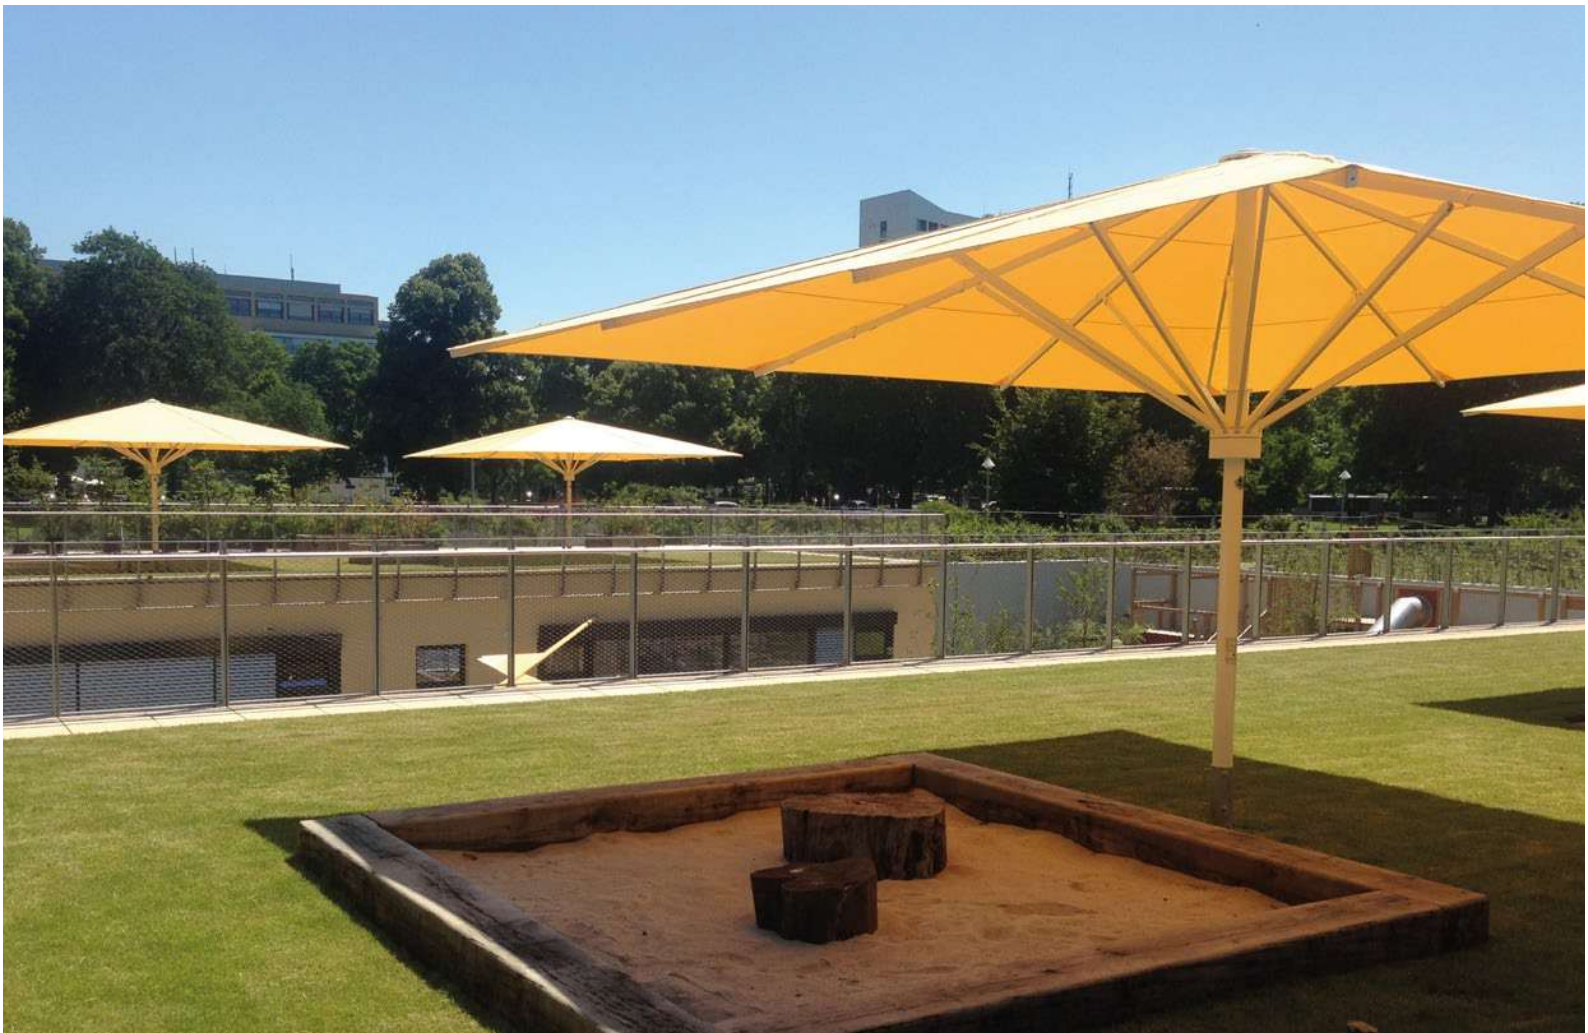

ALBATROS 5.0 x 5.0 m
MAY-TEX Acryl DA 7560 light yellow

PLAY- SCHOOL PARASOL



Brochure download at:
www.may-online.com/en/catalogue-download



Impact protection for parasol mast Ø 100 mm

Make sure that the children's playing area is safe. Without safety precautions, carefree romping around may lead to tears. The soft material protects from painful bumps up to a height of 90 cm. If correctly mounted, our protective padding also covers the anchor tube. The vertical connection is fully fastened by hook-and-loop fastener. Therefore, the impact protection is optimally adapted to the parasol mast and so helps to minimize hard edges and corners that may lead to abrasions. Made from MayTex-PVC, available in all PVC colours of our cloth collection.

art. no. **350269**

ALBATROS ACCESSORIES



ALBATROS 5.0 × 5.58 m
MayTex-Acryl SA 314 001 cherry
Frame finish RAL 7016

Lubricant LubriMay 13

for threaded spindle, content: 100 g.

art. no. **350652**



CleanoMay 13


This highly efficient cleaning concentrate removes grease, oil, coal, rust as well as other stubborn stains on your parasol canopy covering or frame. It can also serve to clean machines, kitchens (recognised as safe for foodstuffs by the Fresenius Institute), barbeque grills, tarpaulins and plastics. Moreover, CleanoMay 13 is non-toxic, biodegradable, non-flammable and non-corroding. 1 litre concentrate yields 26 litres liquid cleanser.

art. no. **350848**



Substitute canopy covering

An occasional change of canopy covering can give your patio a completely new flair.

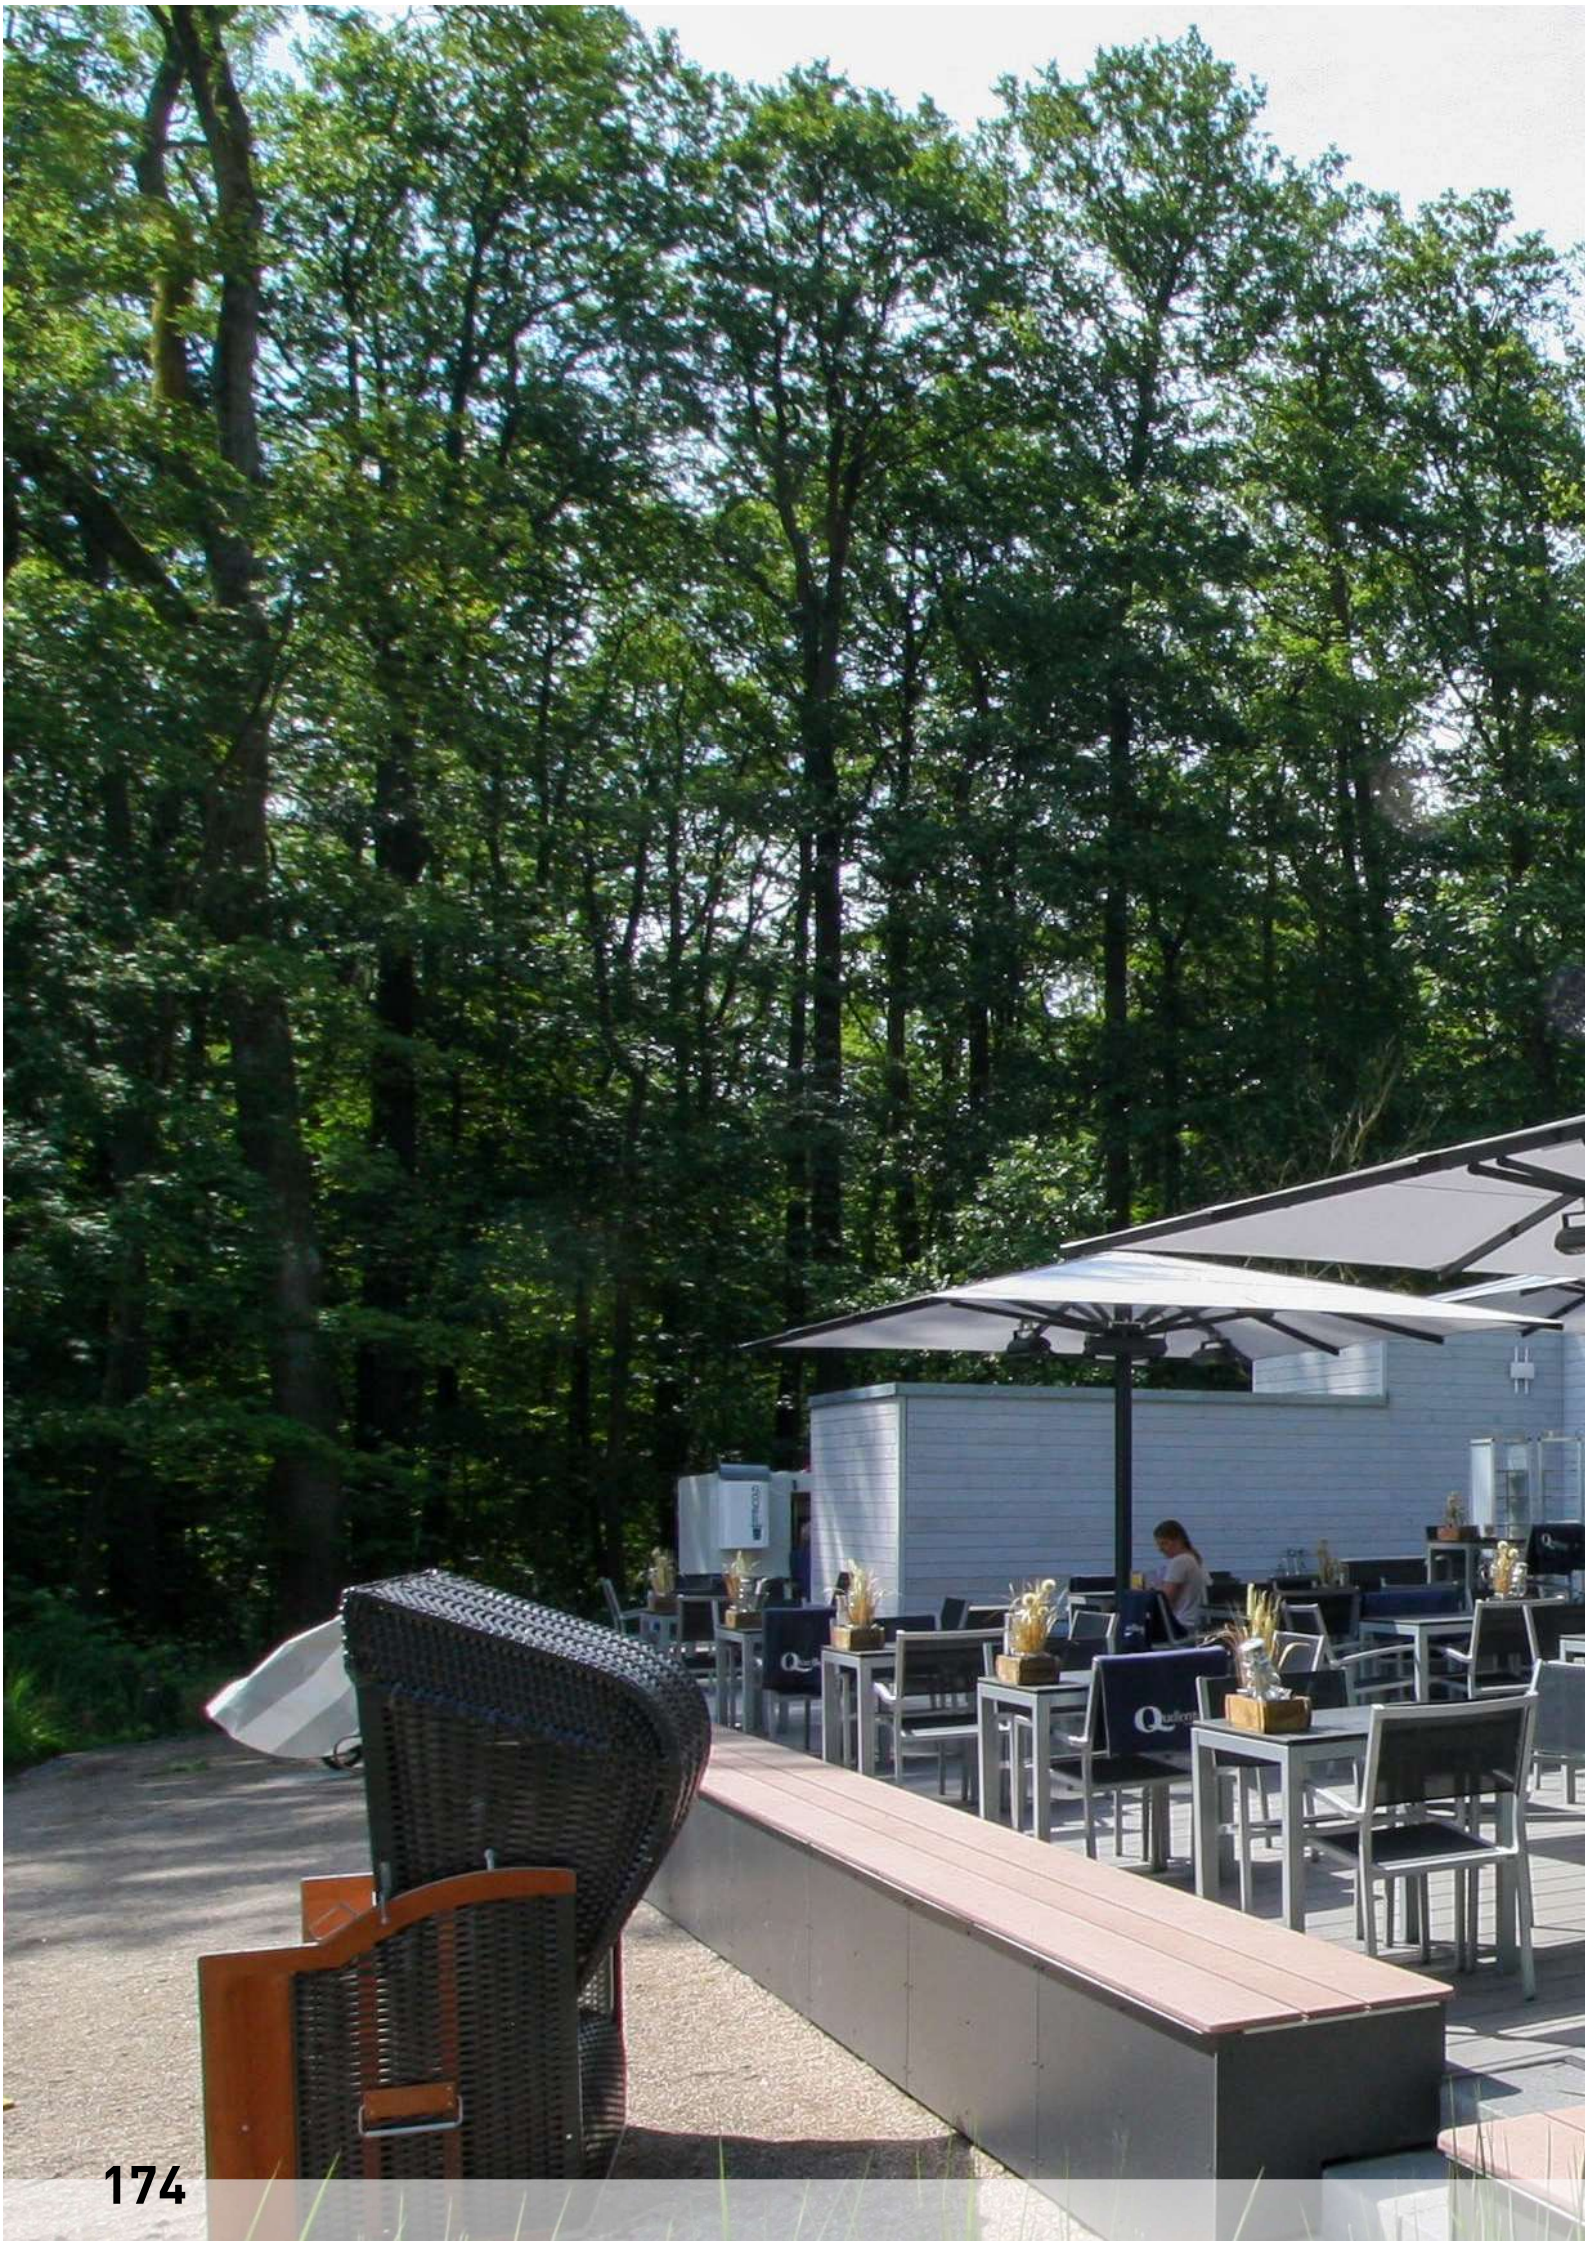




ALBATROS 3.5 x 5.0 m
MayTex-Acryl SA 314 030 light grey

Electric kits

Below you will find a list of our range of all-in kits on offer. Choose a parasol and one of the kits listed. From page 204 onwards you will find more information on the individual kit components.





	Article no.	Ø 4,0 m 8 panels	Ø 4,0 m 12 panels	Ø 4,5 m 8 panels	Ø 4,5 m 12 panels	Ø 5,0 m 8 panels	Ø 5,0 m 12 panels	Ø 5,5 m 8 panels	Ø 5,5 m 12 panels	Ø 6,0 m 8 panels	Ø 6,0 m 12 panels	Ø 6,5 m 8 panels	Ø 6,5 m 12 panels	Ø 7,0 m	Ø 8,0 m	Ø 9,0 m	Ø 10,0 m
LED-Lighting warm white																	
Kit A 4LED	350962	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 6LED	350989	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 8LED	350964	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 10LED	350965		•		•		•		•		•		•	•	•	•	•
Kit A 12LED	350966		•		•		•		•		•		•	•	•	•	•





LED-Lighting RGB-warm white																	
Kit A 4RGB	352974	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 6RGB	352975	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 8RGB	352976	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 10RGB	352977		•		•		•		•		•		•	•	•	•	•
Kit A 12RGB	352978		•		•		•		•		•		•	•	•	•	•





Infrared heaters																	
Kit A 0 4A 	351494							•	•			•	•		•	•	•
Kit A 0 4Z 	351495	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•






Infrared heaters + LED-Lighting warm white																	
Kit A 4LED 4A 	355154							•	•			•	•		•	•	•
Kit A 6LED 4A	350990							•	•			•	•		•	•	•
Kit A 8LED 4A	350980							•	•			•	•		•	•	•
Kit A 4LED 4Z 	355155	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 6LED 4Z	350991	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 8LED 4Z	350981	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•










Infrared heaters + LED-Lighting RGB-warm white																	
Kit A 4RGB 4A 	355156							•	•			•	•		•	•	•
Kit A 6RGB 4A	352990							•	•			•	•		•	•	•
Kit A 8RGB 4A	352993							•	•			•	•		•	•	•
Kit A 4RGB 4Z 	355157	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 6RGB 4Z	352991	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 8RGB 4Z	352994	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•





The kits can, however, only be applied in combination with installation options AZ024, AZ120, AZ128, AZ186, AZ194, AZ256, AZ257, AZ258, AZ259 and AZ210. We recommend 4 lights and 4 heaters for parasols with an area of up to 30 m².

			3.0 x 3.0 m	3.5 x 3.5 m 8 panels	3.5 x 3.5 m 12 panels	4.0 x 4.0 m 8 panels	4.0 x 4.0 m 12 panels	4.5 x 4.5 m 8 panels	4.5 x 4.5 m 12 panels	5.0 x 5.0 m 8 panels	5.0 x 5.0 m 12 panels	5.5 x 5.5 m 8 panels	5.5 x 5.5 m 12 panels	6.0 x 6.0 m 8 panels	6.0 x 6.0 m 12 panels	6.5 x 6.5 m	7.0 x 7.0 m
	LED-Lighting warm white																
	Kit A 4LED	350962	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Kit A 6LED	350989	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Kit A 8LED	350964	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Kit A 10LED	350965			•		•		•		•		•		•	•	•
	Kit A 12LED	350966			•		•		•		•		•		•	•	•


	LED-Lighting RGB-warm white																
	Kit A 4RGB	352974	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Kit A 6RGB	352975	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Kit A 8RGB	352976	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Kit A 10RGB	352977			•		•		•		•		•		•	•	•
	Kit A 12RGB	352978			•		•		•		•		•		•	•	•

	Infrared heaters																
	Kit A 0 4A 	351494								•	•	•	•	•	•	•	•
	Kit A 0 4Z 	351495	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

	Infrared heaters + LED-Lighting warm white																
	Kit A 4LED 4A 	355154								•	•	•	•	•	•	•	•
	Kit A 6LED 4A	350990								•	•	•	•	•	•	•	•
	Kit A 8LED 4A	350980								•	•	•	•	•	•	•	•
	Kit A 4LED 4Z 	355155	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Kit A 6LED 4Z	350991	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Kit A 8LED 4Z	350981	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

	Infrared heaters + LED-Lighting RGB-warm white																
	Kit A 4RGB 4A 	355156								•	•	•	•	•	•	•	•
	Kit A 6RGB 4A	352990								•	•	•	•	•	•	•	•
	Kit A 8RGB 4A	352993								•	•	•	•	•	•	•	•
	Kit A 4RGB 4Z 	355157	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Kit A 6RGB 4Z	352991	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Kit A 8RGB 4Z	352994	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•





	Article no.	3.0 x 4.0 m	3.0 x 6.0 m	3.5 x 5.0 m	3.5 x 5.5 m	3.5 x 7.0 m	3.5 x 7.5 m	4.0 x 4.5 m	4.0 x 5.0 m	4.0 x 6.0 m	4.0 x 7.0 m	4.0 x 8.0 m	4.5 x 5.0 m	4.5 x 5.5 m	4.5 x 6.0 m	4.5 x 7.5 m	5.0 x 5.85 m
LED-Lighting warm white																	
Kit A 4LED	350962	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 6LED	350989	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 8LED	350964	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 10LED	350965	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 12LED	350966												•	•	•		•





LED-Lighting RGB-warm white																	
Kit A 4RGB	352974	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 6RGB	352975	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 8RGB	352976	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 10RGB	352977	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 12RGB	352978												•	•	•		•





Infrared heaters																	
Kit A 0 4A 	351494				•		•		•	•	•		•	•	•	•	
Kit A 0 4Z 	351495		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



Infrared heaters + LED-Lighting warm white																	
Kit A 4LED 4A 	355154				•		•		•	•	•		•	•	•	•	
Kit A 6LED 4A	350990				•		•		•	•	•		•	•	•	•	
Kit A 8LED 4A	350980				•		•		•	•	•		•	•	•	•	
Kit A 4LED 4Z 	355155		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 6LED 4Z	350991		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 8LED 4Z	350981		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



Infrared heaters + LED-Lighting RGB-warm white																	
Kit A 4RGB 4A 	355156				•		•		•	•	•		•	•	•	•	
Kit A 6RGB 4A	352990				•		•		•	•	•		•	•	•	•	
Kit A 8RGB 4A	352993				•		•		•	•	•		•	•	•	•	
Kit A 4RGB 4Z 	355157		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 6RGB 4Z	352991		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit A 8RGB 4Z	352994		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



Article no.

5.0 × 7.5 m

5.5 × 6.0 m

6.0 × 7.0 m

6.0 × 8.0 m

7.0 × 8.0 m



LED-Lighting warm white

Kit A 4LED	350962	•	•	•	•	•
Kit A 6LED	350989	•	•	•	•	•
Kit A 8LED	350964	•	•	•	•	•
Kit A 10LED	350965	•	•	•	•	•
Kit A 12LED	350966		•	•	•	•



LED-Lighting RGB-warm white

Kit A 4RGB	352974	•	•	•	•	•
Kit A 6RGB	352975	•	•	•	•	•
Kit A 8RGB	352976	•	•	•	•	•
Kit A 10RGB	352977	•	•	•	•	•
Kit A 12RGB	352978		•	•	•	•





Infrared heaters

Kit A 0 4A	 351494	•	•	•	•	•
Kit A 0 4Z	 351495	•	•	•	•	•





Infrared heaters + LED-Lighting warm white

Kit A 4LED 4A	 355154	•	•	•	•	•
Kit A 6LED 4A	350990	•	•	•	•	•
Kit A 8LED 4A	350980	•	•	•	•	•
Kit A 4LED 4Z	 355155	•	•	•	•	•
Kit A 6LED 4Z	350991	•	•	•	•	•
Kit A 8LED 4Z	350981	•	•	•	•	•



Infrared heaters + LED-Lighting RGB-warm white

Kit A 4RGB 4A	 355156	•	•	•	•	•
Kit A 6RGB 4A	352990	•	•	•	•	•
Kit A 8RGB 4A	352993	•	•	•	•	•
Kit A 4RGB 4Z	 355157	•	•	•	•	•
Kit A 6RGB 4Z	352991	•	•	•	•	•
Kit A 8RGB 4Z	352994	•	•	•	•	•

LED lighting warm white



To dim the LED bar warm white by smart phone or radio transmitter, order the Bluetooth remote dimmer art. no. 352888 and the Bluetooth remote control sender art. no. 352890 see page 212, if applicable.

These packages can be combined with a maximum of one of the following options:

- USB charging station
- loudspeaker

Kit A 4LED art. no. 350962

230 V connection: wiring diagram: may.ag/plan353304.pdf

Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350932
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	4	352187

Kit A 6LED art. no. 350989

230 V connection: wiring diagram: may.ag/plan353304.pdf

Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350932
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	6	352187

Kit A 8LED art. no. 350964

12 V connection: wiring diagram: may.ag/plan353305.pdf

Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354520
Electrical harness	1	350932
Power supply unit (PSU) for max. 25 LED bars, installed on the outdoor wall or inside the house	1	358192
LED bar, warm white, without spot optics	8	352187

Kit A 10LED art. no. 350965

12 V connection: wiring diagram: may.ag/plan353305.pdf

Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354520
Electrical harness	1	350932
Power supply unit (PSU) for max. 25 LED bars, installed on the outdoor wall or inside the house	1	358192
LED bar, warm white, without spot optics	10	352187

Kit A 12LED art. no. 350966

12 V connection: wiring diagram: may.ag/plan353305.pdf

Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354520
Electrical harness	1	350932
Power supply unit (PSU) for max. 25 LED bars, installed on the outdoor wall or inside the house	1	358192
LED bar, warm white, without spot optics	12	352187

LED lighting RGB-ww (colours & warm white)



LED-bar RGB-ww
(colours and warmwhite):
Information on colour control and
dimming by smartphone or
Bluetooth remote control sender
art. no. 352890, see page 212.

These packages can be combined with a
maximum of one of the following options:

- USB charging station
- loudspeaker

Kit A 4RGB art. no. 352974

230 V connection: wiring diagram: may.ag/plan353304.pdf

Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350932
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	4	353925

Kit A 6RGB art. no. 352975

230 V connection: wiring diagram: may.ag/plan353304.pdf

Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350932
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	6	353925

Kit A 8RGB art. no. 352976

12 V connection: wiring diagram: may.ag/plan353305.pdf

Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350932
Power supply unit (PSU) for max. 25 LED bars, installed on the outdoor wall or inside the house	1	358192
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	8	353925

Kit A 10RGB art. no. 352977

12 V connection: wiring diagram: may.ag/plan353305.pdf

Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354520
Electrical harness	1	350932
Power supply unit (PSU) for max. 25 LED bars, installed on the outdoor wall or inside the house	1	358192
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	10	353925

Infrared heaters



In standard cases these kits are firmly connected with the underground cable.

Alternatively, plug connector art. no. 200581 can be used.

These packages can be combined with a maximum of one of the following options:

- USB charging station
 - loudspeaker
 - timer switch

Kit A 12RGB art. no. 352978

12 V connection: wiring diagram: may.ag/plan353305.pdf

Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354520
Electrical harness	1	350932
Power supply unit (PSU) for max. 25 LED bars, installed on the outdoor wall or inside the house	1	358192
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	12	353925

Kit A 0 4A art. no. 351494

400 V connection: wiring diagram: may.ag/plan353313.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, long (only possible along diagonal spokes)	4	200579
Swivelling holder	4	200577
Infrared heater (RAL 9010 or 9006)	4	200430

Kit A 0 4Z art. no. 351495

400 V connection: wiring diagram: may.ag/plan353313.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, short (please state position intended)	4	200585
Swift-fold spar	4	200578
Infrared heater (RAL 9010 or 9006)	4	200430

Infrared heaters + LED lighting warm white



In standard cases these kits are firmly connected with the underground cable.

Alternatively, plug connector art. no. 200581 (400 V) can be used together with H1-plug connector art. no. 350931 (12V).

To dim the LED bar warm white by smart phone or radio transmitter, order the Bluetooth remote dimmer art. no. 352888 and the Bluetooth remote control sender art. no. 352890 see page 212, if applicable.

These packages can be combined with a maximum of one of the following options:

- USB charging station
- loudspeaker



Kit A 6LED 4A

Kit A 4LED 4A art. no. 355154

400 V connection: wiring diagram: may.ag/plan353310.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, long (only possible along diagonal spokes)	4	200579
Swivelling holder	4	200577
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	4	352187

Kit A 6LED 4A art. no. 350990

400 V connection: wiring diagram: may.ag/plan353310.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, long (only possible along diagonal spokes)	4	200579
Swivelling holder	4	200577
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	6	352187

Kit A 8LED 4A art. no. 350980

12 V + 400 V connection: wiring diagram: may.ag/plan353318.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, long (only possible along diagonal spokes)	4	200579
Swivelling holder	4	200577
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 25 LED bars, installed on the outdoor wall or inside the house	1	358192
LED bar, warm white, without spot optics	8	352187

Kit A 4LED 4Z art. no. 355155

400 V connection: wiring diagram: may.ag/plan353310.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, short (please state position intended)	4	200585
Swift-fold spar	4	200578
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	4	352187

Kit A 6LED 4Z art. no. 350991

400 V connection: wiring diagram: may.ag/plan353310.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, short (please state position intended)	4	200585
Swift-fold spar	4	200578
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	6	352187

Kit A 8LED 4Z art. no. 350981

12 V + 400 V connection: wiring diagram: may.ag/plan353318.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	200369
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, short (please state position intended)	4	200585
Swift-fold spar	4	200578
Infrared heater (RAL 9010 or 9006)	4	200408
Power supply unit (PSU) for max. 25 LED bars, installed on the outdoor wall or inside the house	1	358192
LED bar, warm white, without spot optics	8	352187

Infrared heaters + LED lighting RGB-ww (colours & warmwhite)



In standard cases these kits are firmly connected with the underground cable.

Alternatively, plug connector art. no. 200581 (400 V) can be used together with H1-plug connector art. no. 350931 (12 V).

LED-bar RGB-ww (colours and warmwhite):
Information on colour control and dimming by smartphone or Bluetooth remote control sender art. no. 352890, see page 212.

These packages can be combined with a maximum of one of the following options:

- USB charging station
- loudspeaker (however, not with kits „12 V + 400 V connection“)
- timer switch

Kit A 4RGB 4A art. no. 355156

400 V connection: wiring diagram: may.ag/plan353310.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, long (only possible along diagonal spokes)	4	200579
Swivelling holder	4	200577
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	4	353925

Kit A 6RGB 4A art. no. 352990

400 V connection: wiring diagram: may.ag/plan353310.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, long (only possible along diagonal spokes)	4	200579
Swivelling holder	4	200577
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	6	353925

Kit A 8RGB 4A art. no. 352993

12 V + 400 V connection: wiring diagram: may.ag/plan353318.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354527
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, long (only possible along diagonal spokes)	4	200579
Swivelling holder	4	200577
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 25 LED bars, installed on the outdoor wall or inside the house	1	358192
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	8	353925

Kit A 4RGB 4Z art. no. 355157

400 V connection: wiring diagram: may.ag/plan353310.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, short (please state position intended)	4	200585
Swift-fold spar	4	200578
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	4	353925

Kit A 6RGB 4Z art. no. 352991

400 V connection: wiring diagram: may.ag/plan353310.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, short (please state position intended)	4	200585
Swift-fold spar	4	200578
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	6	353925

Kit A 8RGB 4Z art. no. 352994

12 V + 400 V connection: wiring diagram: may.ag/plan353318.pdf

Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354527
Electrical harness	1	200566
Automatic restart protector	1	202051
Cabling, short (please state position intended)	4	200585
Swift-fold spar	4	200578
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 25 LED bars, installed on the outdoor wall or inside the house	1	358192
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	8	353925

ALBATROS

ACCESSORIES



ALBATROS 6.0 × 6.0 m
MayTex-Acryl SA 314 044 grey-white





ALBATROS 6.0 x 6.0 m
MayTex-PVC 302 544 beige matt

ALBATROS – mobile installation options

Full frame pedestal

frame size 112 × 112 cm, total height 46 cm, height of frame **x** = 9 cm, weight approx. 60 kg, galvanized, theft pin as standard fitting. Suited for XZ49 or standard concrete slabs 50 × 50 × 5 cm (concrete slabs with cut off edge).

art. no. **AZ111**



Full frame pedestal

incl. 8 diagonal support levelling screws, frame size 112 × 112 cm, total height 48 cm, max. 53 cm, weight approx. 63 kg, galvanized, theft pin as standard fitting. Suited for XZ49 or standard concrete slabs 50 × 50 × 5 cm (concrete slabs with cut off edge).

art. no. **AZ112**



Full frame pedestal on feet

for forklift or lift truck transport, 8 diagonal support levelling screws allow a height adjustment of 4 cm each, frame size, frame size 112 × 112 cm, foot height **y** = 10 to 14 cm, total height 56 cm, max. 60 cm, weight approx. 63 kg, galvanized, theft pin as standard fitting. Suited for XZ49 or standard concrete slabs 50 × 50 × 5 cm (concrete slabs with cut off edge).

art. no. **AZ116**



Full frame pedestal with placement hinge


customized height to fit patio surface, incl. 8 diagonal support levelling screws, frame size 112 × 112 cm, weight approx. 74 kg, galvanized, theft pin as standard fitting, incl. top plate for winter protection. Suited for XZ49 or standard concrete slabs 50 × 50 × 5 cm (concrete slabs with cut off edge),

v = bore for power cable through centre post Ø 8.5 cm,

x = 24 cm, **y** = 27.3 cm.

Instructions: may.ag/AZ210_en.pdf

art. no. **AZ210**

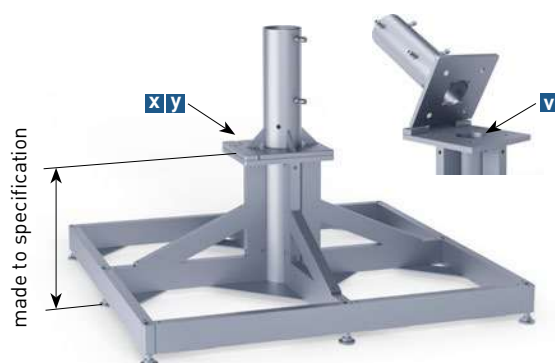


ALBATROS – mobile installation options

Concrete slabs with cut off edge

1 set = 4 slabs, each $50 \times 50 \times 5$ cm. Cut off edge 70 mm x 45° .
weight per slab: approx. 30 kg, total weight approx. 120 kg.

art. no. **XZ49**

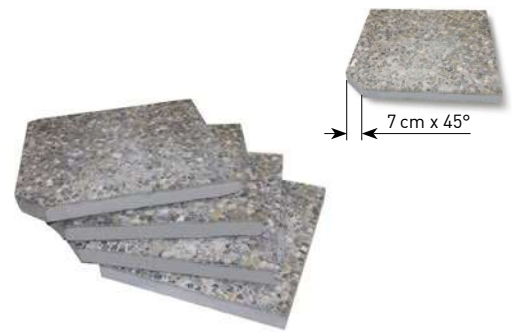

Steel plates with cut off edge

1 set = 4 slabs, each $50 \times 50 \times 1.2$ cm. Cut off edge 70 mm x 45° .
Weight per slab: approx. 29 kg, total weight approx. 116 kg.

art. no. **XZ51**




ALBATROS – mobile installation options

Base pedestal 1-layer with placement hinge

4 steel plates, on site assembled, heaviest component approx. 63 kg, base 147 × 147 cm, steel plate thickness **x** = 15 mm, galvanized, lockable with theft lock as standard, weight approx. 277 kg, **v** = bore for power cable through centre post Ø 8.5 cm.

Instructions: may.ag/AZ246_en.pdf

art. no. **AZ246**

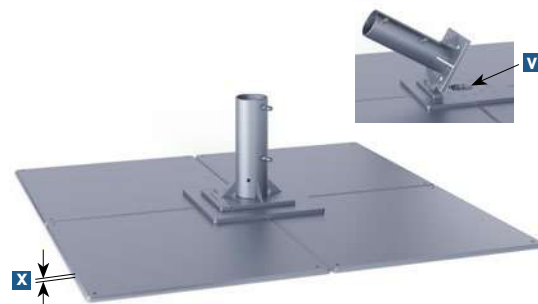

Base pedestal 2-layer with placement hinge

8 steel plates, on site assembled, heaviest component approx. 63 kg, base 147 × 147 cm, steel plate thickness **x** = 15 mm, installation height 2 layer steel plates **y** = 30 mm, galvanized, lockable with theft lock as standard, weight approx. 526 kg, **v** = bore for power cable through centre post Ø 8.5 cm.

Instructions: may.ag/AZ247_en.pdf

art. no. **AZ247**



Base pedestal 3-layer with placement hinge

12 steel plates, on site assembled, heaviest component approx. 63 kg, base 147 × 147 cm, steel plate thickness **x** = 15 mm, installation height 3 layer steel plates **y** = 45 mm galvanized, lockable with theft lock as standard, weight approx. 775 kg, **v** = bore for power cable through centre post Ø 8.5 cm.

Instructions: may.ag/AZ248_en.pdf

art. no. **AZ248**



Base pedestal 4-layer with placement hinge

16 steel plates, on site assembled, heaviest component approx. 63 kg, base 147 × 147 cm, steel plate thickness **x** = 15 mm, installation height 4 layer steel plates **y** = 60 mm galvanized, lockable with theft lock as standard, weight approx. 1024 kg, **v** = bore for power cable through centre post Ø 8.5 cm.

Instructions: may.ag/AZ249_en.pdf

art. no. **AZ249**



Flange plate

with slot hole, suitable for AZ246, AZ247, AZ248 and AZ249 to be able to run the electric cables between the steel plates.

art. no. **357570**



Anti-slip mat

1 set = 4 pieces, 73 × 73 cm each, suitable for the steel plates of the installation options AZ246, AZ247, AZ248, AZ249, AZ256, AZ257, AZ258 and AZ259. Increases the coefficient of friction between steel plate and floor covering (wood, concrete slabs, asphalt), and therefore reduces the risk of slipping during windy weather. Colour black, **x** = 3 mm.

art. no. **352789**





ALBATROS 6.0 × 6.0 m
MayTex-Acryl SA 314 014 mandarine

Concrete base 995 kg for parasols without electrics

Stylish concrete base suitable for all locations that does not allow for a stationary installation option. The smooth fair faced concrete surface can be used as a seat, however, a local carpenter can also construct a cover that optimally integrates the base into your inventory. Useful openings enable the transport with a forklift or lift truck. Up to 4 cm difference in vertical height can be levelled by 4 adjustable feet, **y** = 4.5 to 8.5 cm, height of concrete **x** = 47.5 cm, **z** = 7 cm, total height min. 88 cm, max. 92 cm, base 110 × 110 cm, including concrete reinforcement.

As the ALBATROS centre pole rests on top of the concrete base, the height measurements of the parasol increase about 48.5-52.5 cm. The exact measure depends on the setting of the 4 adjustable feet.


Upper tube: Anchor tube AZ120, encased in concrete, with placement hinge, hot-dip galvanised, lockable with theft lock as standard, included in delivery, without cover disc for winter cover.

Installation information: The elevated position of the placement hinge complicates the installation of the parasol. The parasol needs a minimum ground clearance of 60 cm (see catalogue, measure F), to ensure the spoke ends won't get damaged by the concrete base during assembly, possibly order a length extension of centre pole. Looking at the head clearance, a centre pole shortening may be appropriate. However, this is not possible for all sizes and in combination with the tabular motor. The picture above shows a parasol with a shortened centre pole.

Pay attention to the minimum ballast required depending on the size of parasol. A fork lift must be available on site for the delivery.

Instructions: may.ag/AZ361_en.pdf

art. no. **AZ361**

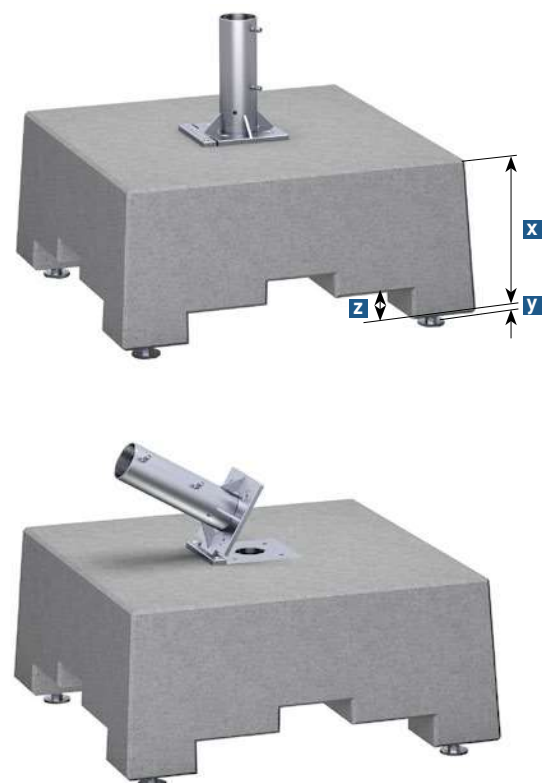

ALBATROS – stationary installation options

Concrete base 995 kg for parasols with electrics


Concrete base analogue AZ361. The integrated cable channel enables a flexible connection of power and speaker cables.

The cable channel is flush mounted at the bottom. Therefore, the forklift or lift truck cannot damage it during transport. The cable channel can be removed, turned about 90°, and fixed again (flexible alignment with placement hinge).

The local electrician connects the power supply to the distributor box, tension relief is ensured by a special end construction with cable gland. If possible, we recommend to run the cable below ground or otherwise to protect it by a cable bridge.

v = bore for power cable through centre post Ø 8.5 cm.

art. no. **AZ371**

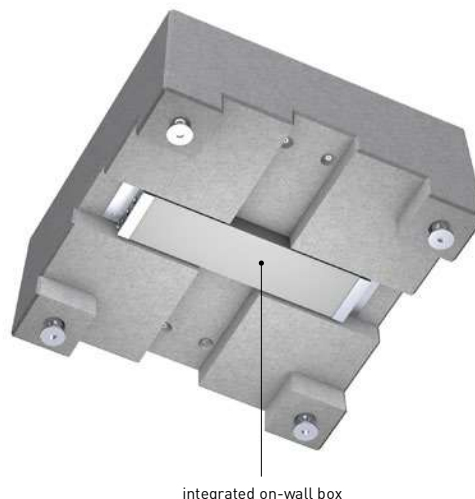

integrated on-wall box

ALBATROS – stationary installation options

Anchor foot to be embedded in concrete with placement hinge
2 pieces, theft pin as standard fitting, galvanized, weight approx. 20.5 kg, incl. top plate for winter protection.


v = bore for power cable through centre post Ø 8.5 cm,

w = bore hole for underground cable Ø 1.3 cm,

a = 36.5 cm, **b** = 41 cm, **x** = 24 cm, **y** = 27.3 cm, **z** = 14.5 cm.

Instructions: may.ag/AZ120_en.pdf

art. no. **AZ120**

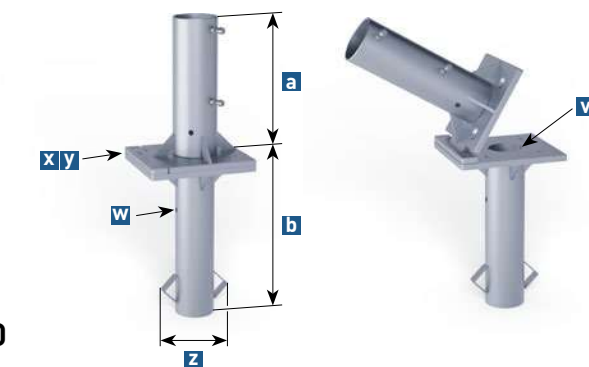

AZ120 options: galvanized

Drainage unit

easy on-site installation, plastic material.

art. no. **357491**




AZ120 upper anchor tube, extra length

AZ120 lower anchor tube, extra length



Instructions: may.ag/extralength.pdf

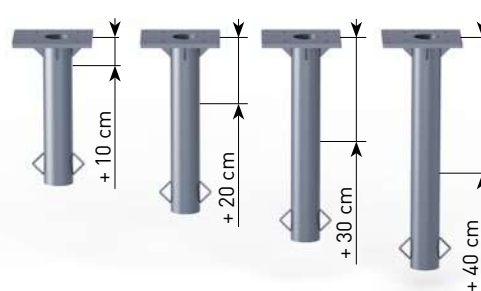

galvanized with additional powder-coating

AZ120 upper anchor tube, standard length



RAL 9010

RAL 7016

ALBATROS – stationary installation options


Dowel-anchored plate with placement hinge

2 pieces, theft pin as standard fitting, galvanized, weight approx. 22 kg. Pre-drill parasol to top of anchor plate on site. Two packages of heavy-duty anchor bolts needed (art. no. 200900).

v = bore for power cable through centre post \varnothing 8.5 cm,
a = 38 cm, **x** = 34 cm, **y** = 37.5 cm, **t** = 1.5 cm, **z** = \varnothing 1.8 cm.

Instructions: may.ag/AZ024_en.pdf

art. no. **AZ024**

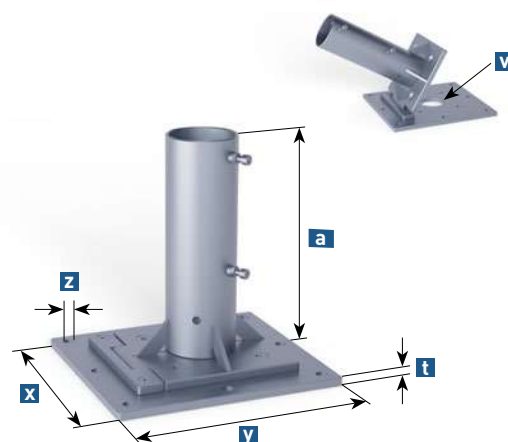

Dowel-anchored plate with placement hinge

customized height to fit patio surface, 2 pieces, theft pin as standard fitting, galvanized, anchor plate 50 × 50 cm, weight approx. 44 kg, incl. top plate for winter protection. Pre-drill parasol to top of anchor plate on site.

v = bore for power cable through centre post \varnothing 8.5 cm.
Two packages of heavy-duty anchor bolts needed (art. no. 200900).
Instructions: may.ag/AZ128_en.pdf

art. no. **AZ128**





ALBATROS – stationary installation options

Flat-roof dowel-anchored plate with placement hinge

externally insulated roof system, system- conform flat roof connection with liquid plastic, customized height to fit flat roof surface, screw-off upper part, lockable with theft lock as standard, galvanized, anchor plate 50 × 50 cm, weight approx. 65 kg, incl. top plate for winter protection. Pre-drill parasol to top of anchor plate on site. Two packages of heavy-duty anchor bolts needed (art. no. 200900). **v** = bore for power cable through centre post Ø 8.5 cm, **x** = 24 cm, **y** = 27.3 cm.

Instructions: may.ag/AZ186_en.pdf

art. no. **AZ186**

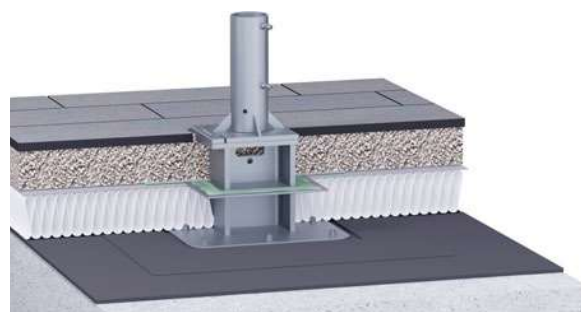
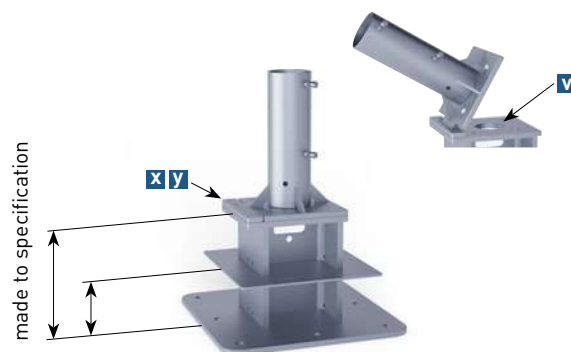


Flat-roof dowel-anchored plate with upper anchor tube

externally insulated roof system, loose-and-fixed flange assembly, bitumen waterproofing system and synthetic waterproofing material. Total height is determined by order to achieve the same level as the flat roof ground, dowelled plate 50 × 50 cm. Upper part removable, lockable with theft lock as standard, galvanized, weight approx. 37 kg, including top plate for winter protection. Pre-drill parasol to top of anchor plate on site. Two packages of heavy-duty anchor bolts needed (art. no. 200900), **v** = bore for power cable through centre post Ø 8.5 cm, **x** = 24 cm, **y** = 27.3 cm.

Instructions: may.ag/AZ194_en.pdf

art. no. **AZ194**

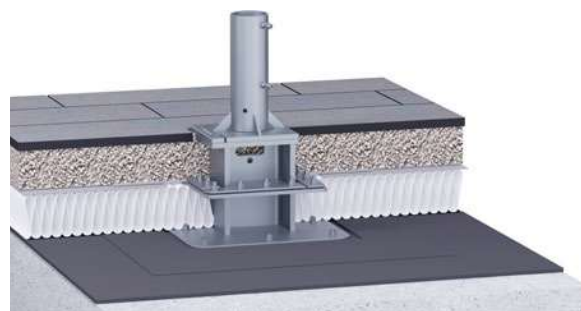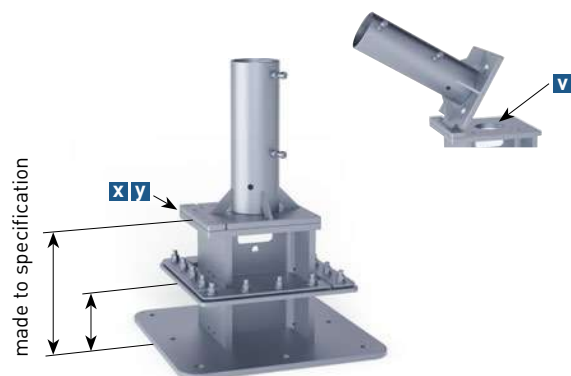

Anchor bolt

bolt and nut, fits for AZ024, AZ128, AZ186 and AZ194 (2 packages needed) approved for cracked and non-cracked concrete B25 to B55 (old compressive strength classes) C20/25 to C50/60, (new EU classification), also suitable for concrete B15 and natural stone with dense structure. Concrete bore hole Ø 16 × 115 mm, in stainless steel A4. Package contains 4 bolts. European Technical Approval ETA-05/0069.

art. no. **200900**




ALBATROS – stationary installation options

Base pedestal 1-layer (4 plates) with placement hinge

total height is determined by order to achieve patio level,
4 steel plates on site assembled, heaviest component approx.
63 kg, base 147 × 147 cm, steel plate thickness **x** = 15 mm, , top
part removeable, lockable with theft lock as standard, galvanized,
weight approx. 322 kg, including top plate for winter protection. **v**
= bore for power cable through centre post Ø 8.5 cm,
y = □ 40 cm.

Instructions: may.ag/AZ256_en.pdf

art. no. **AZ256**

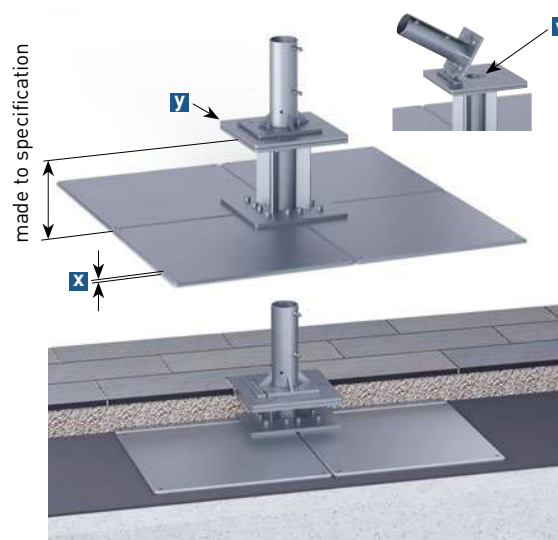


Base pedestal 2-layer (8 plates) with placement hinge

total height is determined by order to achieve patio level,
8 steel plates on site assembled, heaviest component approx.
63 kg, base 147 × 147 cm, steel plate thickness **x** = 15 mm, top
part removeable, lockable with theft lock as standard, galvanized,
weight approx. 568 kg, including top plate for winter protection.
v = bore for power cable through centre post Ø 8.5 cm,
y = □ 40 cm.

Instructions: may.ag/AZ257_en.pdf

art. no. **AZ257**

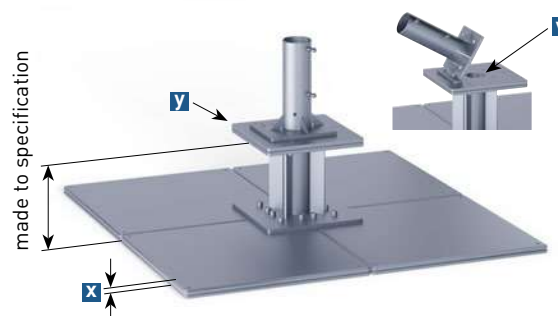


Base pedestal 3-layer (12 plates) with placement hinge

total height is determined by order to achieve patio level,
12 steel plates on site assembled, heaviest component approx.
63 kg, base 147 × 147 cm, steel plate thickness **x** = 15 mm, top
part removeable, lockable with theft lock as standard, galvanized,
weight approx. 817 kg, including top plate for winter protection.
v = bore for power cable through centre post Ø 8.5 cm,
y = □ 40 cm.

Instructions: may.ag/AZ258_en.pdf

art. no. **AZ258**

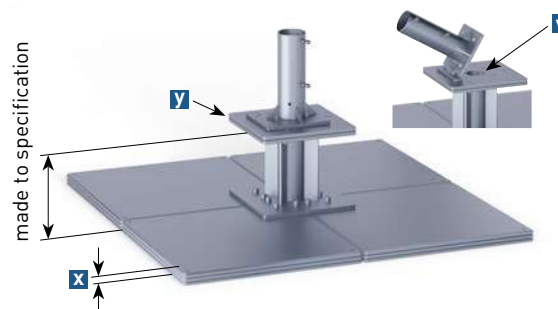


Base pedestal 4-layer (16 plates) with placement hinge

total height is determined by order to achieve patio level,
16 steel plates on site assembled, heaviest component approx.
63 kg, base 147 × 147 cm, steel plate thickness **x** = 15 mm, top
part removeable, lockable with theft lock as standard, galvanized,
weight approx. 1,066 kg, including top plate for winter protection.
v = bore for power cable through centre post Ø 8.5 cm,
y = □ 40 cm.

Instructions: may.ag/AZ259_en.pdf

art. no. **AZ259**

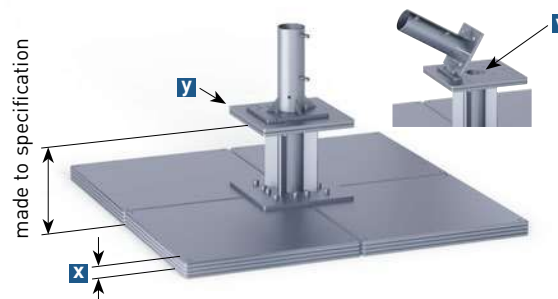

Theft pin

padlock and pin, in stainless steel (AISI 304, 1.4301), for support
pole Ø 100 mm, suitable for retrofitting.

art. no. **200826**

